


PRODUCT CATALOG



THE GLOBAL APPROACH TO LIGHTNING

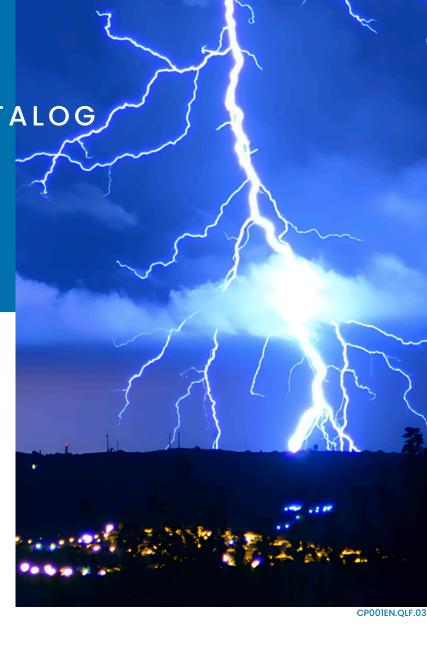

SUMMARY

| 00 | ED ANIZUNI ED ANIGE |
|----|--|
| 03 | FRANKLIN FRANCE |
| 80 | PRACTICAL GUIDE |
| 18 | LIGHTNING PRODUCTS |
| 19 | LIGHTNING RODS |
| 27 | LIGHTNING COUNTERS |
| 28 | MAST EXTENSIONS AND FIXINGS |
| 31 | MESHED CAGES |
| 32 | CONDUCTORS |
| 34 | CONDUCTOR FIXINGS |
| 39 | EARTHING SYSTEM |
| 44 | CONDUCTOR CONNECTIONS |
| 46 | SURGE PRODUCTS |
| 49 | MULTIPOLAR LV SURGE ARRESTERS TYPE 1+2 MODE C1 |
| 50 | PMULTIPOLAR LV SURGE ARRESTERS TYPE 1+2 MODE C2 |
| 51 | UNIPOLAIRES LV SURGE ARRESTERS TYPE 1+2+3 |
| 52 | SURGE PROTECTORS N/PE UNIPOLAR |
| 53 | MULTIPOLAR LV SURGE ARRESTERS TYPE 1+2+3 MODE C2 |
| 54 | SURGE ARRESTERS UNIPOLAIRES TYPE 2 |
| 55 | MULTIPOLAR LV SURGE ARRESTERS TYPE 2 MODE C2 |
| 56 | SINGLE-POLE LV SURGE PROTECTORS TYPE 2 (OR 3) |
| 57 | MULTIPOLAR LV SURGE PROTECTORS TYPE 2 (OR 3) MODE C2 |
| 58 | SPECIFIC SURGE ARRESTER DISCONNECTORS |
| 59 | SPECIFIC SURGE ARRESTER DISCONNECTORS |
| 60 | ASSOCIATED PRODUCTS |
| 61 | STORM DETECTOR |
| 62 | GUYING KIT |
| 63 | PYLONS |
| 64 | AERIAL BEACONS |



FRANKLIN FRANCE

World leader in the manufacture of lightning protection systems, Franklin France is committed to always serving you better by exploiting the development resources of a large structure by combining the responsiveness and proximity of a company on a human scale. ISO 9001 certified, Franklin France is constantly evolving and draws its wealth from the quality of its teams and experts. Product quality and customer satisfaction are its priority.


Our global approach to lightning is available through:

- Listening and customer satisfaction-oriented service with national and international logistics and multilingual teams specializing in import-export.
- Mastering the lightning phenomenon with its research, engineering and development teams, and the support of the Lightning Innovation and Research Institute (Liri) laboratory.
- Carrying out lightning risk analyzes (LRA) and technical studies (TS), with ProtecRisk software.
- Innovative products constantly at the cutting edge of technology including the Active 1D® Lightning Rods, Active 2D® (remote testable), and the 4D® protection unit.
- Installation, verification and maintenance.
- Communication through our website and social networks (Linkedin, Facebook).

Obtaining the Qualifoudre standard since 2005 demonstrates the quality of services in 5 areas: Manufacturing, Lightning Risk Analysis, Technical Study, Installation and Verification with qualified personnel from level I to IV.



OUR HISTORY

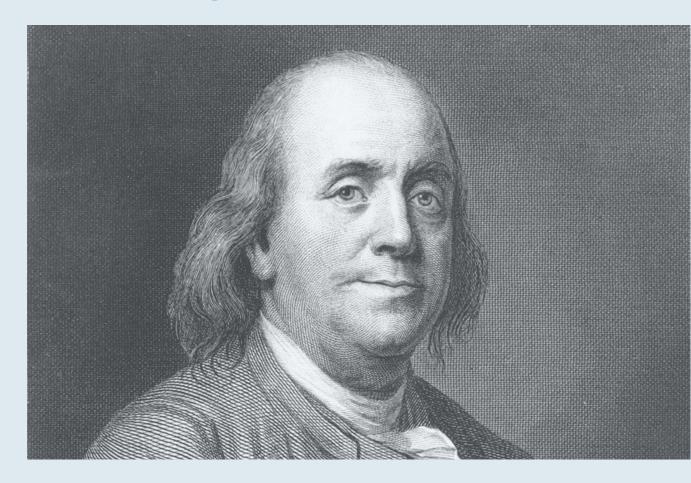

WHY FRANKLIN FRANCE?

The name Franklin France is not chosen at random, but rather in homage to Benjamin Franklin. At the time, when the natural phenomenon of lightning was still largely unexplored, it was with a clairvoyant vision that he designed a lightning rod consisting of a pointed metal pole connected to a conductor descending to the ground. The objective was to attract the lightning towards the mast and direct it safely to the ground, thus protecting the buildings from fires started by the lightning bolts. The name chosen for the company therefore reflects the qualities of Benjamin Franklin: a deep dedication to innovation and protection, fundamental values and missions that are an integral part of our company.

It is in this spirit that Franklin France was founded at the end of the 1980s by Michel Roubinet, an engineer by training. Under his leadership, we have refined our lightning protection services, guided by Franklin's visionary legacy. Since its creation, the company's main activity has been the design, production, marketing and installation of protection equipment against lightning and atmospheric surges.

What distinguishes Franklin France as a French manufacturer is its unique ability to meet all needs related to lightning: direct and indirect protection, up to storm detection.

FRANKLIN FRANCE PRODUCT CATALOG

OUR VISION

People are at the heart of the company's overall development strategy. This allows us to build lasting, mutually beneficial relationships, both within our business and in our interactions with customers.




OUR MISSION

- We are committed to exceeding our customers' expectations by offering a service based on attentive listening and responding to their needs.
- Our commitment to quality is evident in our premium products, all carefully designed to meet the highest standards.
- Our products offer a comprehensive approach to lightning, combining technological innovation and expertise to ensure maximum safety.

5 SUBSIDIARIES

WE ARE EVERYWHERE IN FRANCE

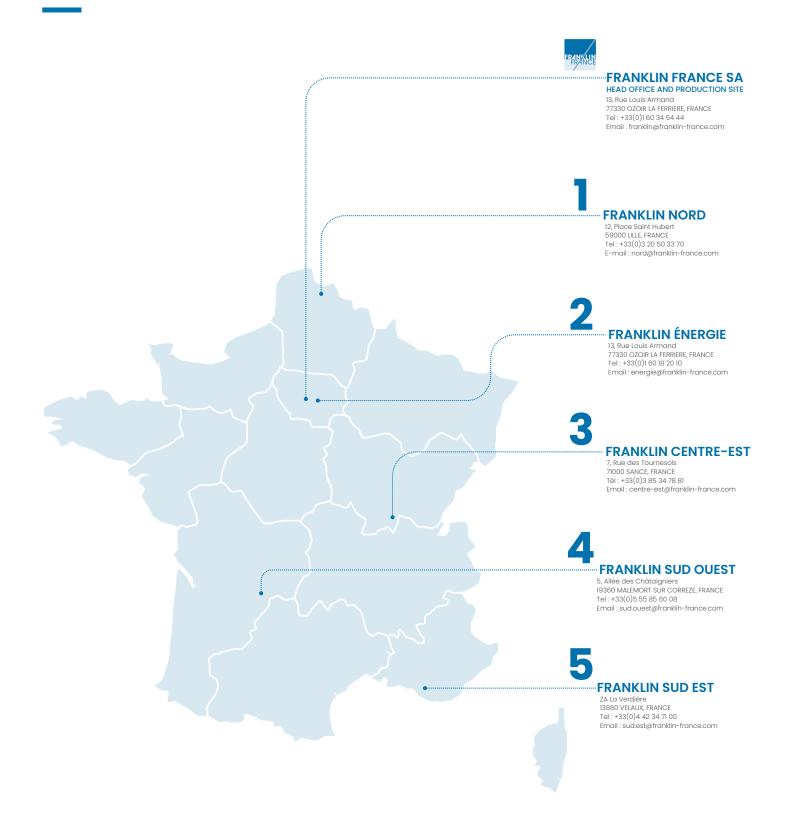

FRANKLIN FRANCE

AN INTERNATIONAL DIMENSION







in more than 80 countries











+ of 150 000 ESEs sold worldwide

PRACTICAL GUIDE



THE GLOBAL APPROACH TO LIGHTNING

Protecting yourself against lightning does not consist of simply installing lightning rods. In fact, their installation only guarantees the protection of structures and individuals against the direct impacts of lightning. A significant part of the current generated by lightning and captured by a lightning rod is dissipated in the earth of the installation. However, indirect effects, such as transient surges, resulting from lightning strikes on or near a facility can be extremely critical to equipment.

Protection can only be effective and reliable when all phenomena are taken into account to protect against:

- · The direct effects of lightning,
- Indirect effects such as earth rises, induced currents, etc.
- Grounding faults.

Protection can only be achieved as part of a global approach which assumes control of all stages, namely:

- Lightning risk analysis (LRA) determining the risk level from 1 to 4,
- The technical study (TS) making it possible to define the protection device appropriate to each situation and its method of installation,
- The implementation of protection devices in accordance with the standards in force until final acceptance of the installation,
- Maintenance of the lightning protection system.

PREVENTION

Advanced detection of storms allows, with an anticipation period, to implement procedures and means of protection, likely to limit the importance of the destructive effects of storms with a view to reducing their impact and cost. economic.

LIGHTNING RISK ANALYSIS, TECHNICAL STUDY, VERIFICATIONS

Drawing on its engineering and installation service, FRANKLIN FRANCE carries out on behalf of specifiers and its customers all the steps necessary for the smooth running of projects, from risk assessment to installation verification.:

- Lightning Risk Analysis according to the IEC / NF EN 62305-2 standard, the decree of February 28, 2022 in particular with the ProtecRisk software.
- Technical study according to standards: IEC / NF EN 62305-3 & 4, NFC 17-102, NFC 15 100, UTE-C guide 15
 443...
- Initial and periodic checks according to technical studies and standards applicable to the different sites at the time of installation.

| PROTECTION LEVEL | VISUAL INSPECTION (YEAR) | COMPLETE INSPECTION (YEAR) | COMPLETE INSPECTION OF CRITICAL SYSTEMS (YEAR) |
|------------------|--------------------------|----------------------------|--|
| 1 and 2 | 1 | 2 | 1 |
| 3 and 4 | 2 | 4 | 1 |

PROTECTION AGAINST LIGHTNING

Protection against lightning or "direct effects" consists of:

- Capture lightning by creating a preferred point of impact with a natural or specific capture device (lightning rod, mesh cage or stretched wire),
- Channel the lightning current by facilitating its passage by "earth descents",
- Flow the lightning current to the earth by ensuring its dispersion in the ground with a lightning conductor earth network.





THE MESHED CAGE


Meshed cage protection consists of creating, on the surface of a building, a large mesh Faraday cage, connected to the ground with earth connections. Small rods (0.5 meters), called shock points, can be placed around the edges of roof meshes and on all exits (chimneys, aedicules, etc.).

The size of the mesh as well as the distance between two downspouts depend on the level of protection to be achieved as described in the IEC / NF EN 62305-3 standard.


| PROTECTION LEVEL | FICTITIOUS SPHERE RADIUS R | MESH SIZE | DESCENT SPACE |
|------------------|----------------------------|-----------|---------------|
| I | 20 m | 5 X 5 m | 10 m |
| II | 30 m | 10 x 10 m | 10 m |
| III | 45 m | 15 x 15 m | 15 m |
| IV | 60 m | 20 x 20 m | 20 m |

THE TIGHT STRAND

This system consists of protecting a structure by avoiding coming into contact with it. This protection is often used in the case of storage of dangerous products (interior or exterior). This system is governed by the IEC / NF EN 62305-3 standard.

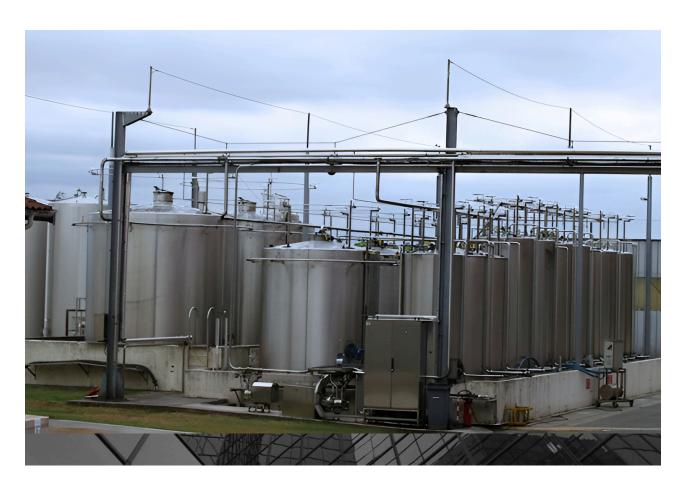

PROTECTION ANGLES (IEC/NF EN 62305-3)

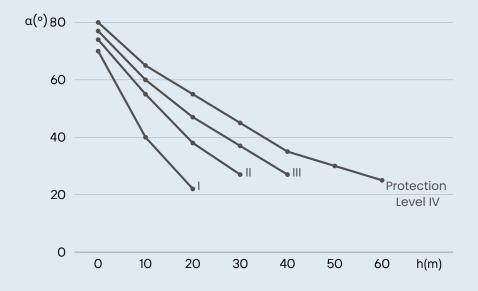

h: height of the capture device above the volume to be protected.

"a": half angle at the top of the cone of revolution, defining the protection radius.

I, II, III, IV: protection levels defined by standard NF EN 62305-3.

TO SIMPLE RODS

Also called Franklin type rod lightning rods, these installations consist of the construction, in the upper part of the structures to be protected, of tapered points connected to the earth by the most direct route. We can then determine a protection cone (described in the IEC / NF EN 62305–3 standard) which is a function of the height where it is located and the level of protection. Unlike the meshed cage, this protects the elements that are within its protection radius. This system is generally used on small buildings or on pylons.

THE ESE

The principle of a Lightning Rod consists of equipping a simple rod with a device to reduce the value of the initiation times.

The ESE initiates the discharge earlier than a simple rod with an ignition advance Δt , it therefore has a better probability of capturing the descending tracer and channeling the lightning current. The radius of protection offered by this type of lightning rod is therefore much greater than a simple rod. Its implementation is governed by standard NFC 17-102.





- Active Lightning Rod ID/2D®
- 2 Fixing the mast and driver
- 3 Horizontal conductor mounting
- 4 Avoid right angles
- Conductor attachment: 3 per meter
- 6 Impact controller
- 7 Cut-off terminal
- Inspection manhole
- 9 Lightning earth connection
- 10 Second Lightning Descent
- Power grid protection
- Protection of data
- 13 Coaxial cable protection
- 14 Active 2D® remote tester

INSTALLATION OF THE LIGHTNING ROD AND THE DOWNSPOUT

The principles of lightning installation are given in the two main standards: IEC / NF EN 62305-3 & 4 for the protection of structures against lightning and NF C 17-102 for the protection by ESE of structures and open areas:

- Any lightning rod must preferably be placed on the highest point, possibly enhanced by one (or more) extension pole(s), extending at least two meters above all the roof elements to be protected. The number of fixing brackets will depend on the height of the lightning rod and the wind region.
- Each lightning rod alone must be equipped with two down conductors, preferably made of tinned copper tape complying with the IEC / NF EN 62561-4 standard, fixed according to the applicable standard. Each down conductor will be equipped with its accessories (cutting terminal, protective sheath, nameplate).



REMOVAL AND HANDLING OF RADIOACTIVE LIGHTNING RODS

Franklin France carries out the removal and handling of radioactive lightning rods on all types of buildings and throughout the metropolis (Authorization from the ASN Nuclear Safety Authority n°F420002).

While awaiting final disposal, the radioactive lightning rods are stored in our approved storage facilities located in Ozoir-la-Ferrière (77), Malemort sur Corrèze (19), Velaux (13).

PROTECTION AGAINST OVERVOLTAGE

Protection against transient overvoltages or "indirect effects" consists of:

- Prevent lightning current from reaching equipment by diverting it to earth with a lightning arrester or surge protector,
- Maintain a residual voltage compatible with the protected equipment,
- Channel and drain current to ground.





EARTH CONNECTIONS AND EQUIPOTENTIALITY

An installation can only be effectively protected if:

- The flow of current to earth and its dispersion in the ground are guaranteed by creating a low impedance earth connection (as conductive as possible),
- All the metal masses of the building are equipotentially connected to the building's electrical earth or "excavation base",
- The "equipotentiality" of the building earth and the lightning conductor earth is achieved.
- The resistivity of the earth does not exceed a value of 10 ohms.

EARTH CONNECTIONS

The lightning ground network can be constituted differently depending on the standards used:


1) ESE (NFC 17-102):

- Creation of type A earth connections with a value less than
 or equal to 10 Ω or failing that made up of a measurement
 of electrodes given by the standard in force.
- Creation of a type B earth network (loop at the bottom of the excavation on the periphery of the building to be protected, supplemented by simplified type A earth connections at the foot of each down conductor).


2) Meshed cage, tight strand, simple rod (IEC / NF EN 62305-3):

- Creation of type A earth connections with a value less than
 or equal to 10 Ω or failing that made up of a measurement
 of electrodes according to the level of protection and the
 resistivity of the ground given in figure 2 of the standard.
- Creation of a type B earth network (loop at the bottom of the excavation on the periphery of the building to be protected, supplemented by type A earth connections, all dimensioned according to figure 2 of the standard).

The earth connection value must be measured by conventional means at the earth connection isolated from any other conductive element. Below, example of measurement using the 3 stakes method:

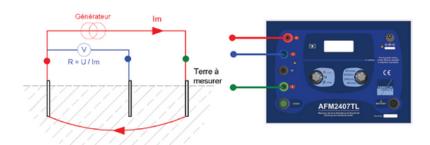

Measuring the resistivity of the ground allows you to size type A and/or type B earth networks according to the IEC / NF EN 62305-3 standard.

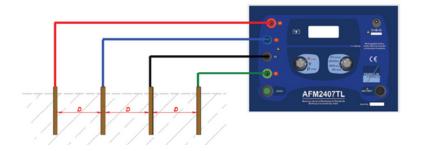






INSTALLATION OF LIGHTNING EARTH CONNECTIONS

The earth connection of the lightning conductor must be connected equipotentially, either directly to the earth circuit at the bottom of the accessible excavations, or to a hold brought back to the foot of the descent, using a conductor conforming to the IEC / NF EN 62561-2 standard. It will be made disconnectable from the site's ground network via an inspection pit or an equipotentiality strip. There are several type A earth connections, which mainly depend on the environment in which they are going to be installed:

- 1) By triangulated stakes: this is one of the two earth connections described in the standard, and which uses the least conductor.
- 2) Crow's feet system: this is the second earth connection described in the standard. It occupies a larger surface area since the 3 horizontal conductors are each 8 m.
- 3) Improved crow's feet system: it often allows soils of different types to be found to reduce resistance by completing each strand with a vertical earth electrode.
- 4) By aligned stakes: this system is used in conditions where earthmoving areas are restricted.
- 5) Simplified earth connection (NFC 17-102): it consists of the installation of 4 meters of horizontal electrodes or 2 meters vertical in addition to the type B earth network.

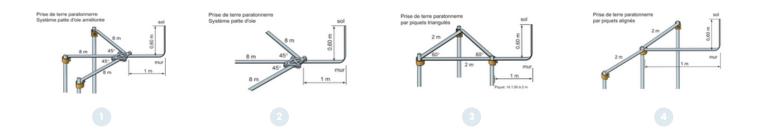



JIGHTNING PRODUCTS

LIGHTNING PRODUCTS

| | ACTIVE 1D+ | | | ACTIV | /E 1D+ | | AC1 | IVE 2D® | ACTIVE | 4D® | | ACTIV | /E 1D+ | | AC | CTIVE 1D | +/2D®/4I | D® | | |
|--------|------------|-------|------|-------|--------|-------|-------|---------|--------|-------|-------|-------|--------|-------|-------|----------|----------|-------|-------|-----|
| Rp (m) | | T = 1 | 2 μs | | | T = 2 | !5 µs | | | T = 3 | 80 µs | | | T = 4 | l5 μs | | | T = 6 | 60 µs | |
| h (m) | I | II | Ш | IV | ı | II | III | IV | 1 | II | Ш | IV | 1 | II | III | IV | 1 | II | III | IV |
| 2 | 11 | 13 | 16 | 19 | 17 | 20 | 23 | 26 | 19 | 22 | 25 | 28 | 25 | 28 | 32 | 36 | 31 | 35 | 39 | 43 |
| 4 | 23 | 27 | 32 | 37 | 34 | 39 | 46 | 52 | 38 | 44 | 51 | 57 | 51 | 57 | 65 | 72 | 63 | 69 | 78 | 85 |
| 5 | 28 | 34 | 41 | 46 | 42 | 49 | 57 | 65 | 48 | 55 | 63 | 71 | 63 | 71 | 81 | 89 | 79 | 86 | 97 | 107 |
| 6 | 29 | 34 | 42 | 48 | 43 | 49 | 58 | 66 | 48 | 55 | 64 | 72 | 63 | 71 | 81 | 90 | 79 | 87 | 97 | 107 |
| 8 | 30 | 36 | 43 | 50 | 43 | 50 | 59 | 67 | 49 | 56 | 65 | 73 | 64 | 72 | 82 | 91 | 79 | 87 | 98 | 108 |
| 10 | 30 | 37 | 45 | 52 | 44 | 51 | 61 | 69 | 49 | 57 | 66 | 75 | 64 | 72 | 83 | 92 | 79 | 88 | 99 | 109 |
| 20 | 32 | 41 | 51 | 60 | 45 | 54 | 65 | 75 | 50 | 59 | 71 | 81 | 65 | 74 | 86 | 97 | 80 | 89 | 102 | 113 |
| 30 | 30 | 42 | 55 | 65 | 44 | 55 | 68 | 80 | 49 | 60 | 73 | 85 | 64 | 75 | 89 | 101 | 79 | 90 | 104 | 116 |
| 60 | - | 30 | 55 | 72 | 21 | 46 | 68 | 85 | 30 | 52 | 73 | 90 | 52 | 69 | 89 | 105 | 69 | 85 | 104 | 120 |

PROTECTION BY LIGHTNING ROD WITH STARTING DEVICE

The principle of a Earlu Streamer Emission Lightning Rod (ESE) consists of improving the performance of a single lightning rod (SLR) by a device to reduce the initiation time. The PDA triggers the discharge earlier than a SLR with a priming advance $\Delta T.$ It therefore has a better probability of capturing the descending tracer and channeling the lightning current. Thus, the protection zone offered by this type of lightning rod is much greater than a simple rod lightning rod.

The protection zone of a ESE is defined by the application of the electro-geometric model of the fictitious sphere taking into account the priming advance of the ESE determined in the test laboratory in accordance with the requirements of the NF C standard. 17-102. Practically, the NF C 17-102 standard allows you to calculate the value of the protection radius of the PDA at a given height.


The protection radius of a ESE Pr is linked to its height (h) in relation to the surface to be protected, to its efficiency ΔT and to the level of protection determined by the lightning risk analysis.

The protection radius (Pr) is calculated using the following formulas:

$$R_{p}(h) = \sqrt{2rh - h^2 + \Delta(2r + \Delta)}$$
 pour $h \ge 5$ m et

$$R_p = h \times R_p(5) / 5$$
 pour $2 \text{ m} \le h \le 5 \text{ m}$
Or:

- Pr(m) corresponds to the protection radius at a given height h;
- h(m) corresponds to the height of the end of the ESE on the horizontal plane to the farthest point from the object to be protected;
- r(m) depends on the level of lightning protection
 - 20 m for protection level I;
 - 30 m for protection level II;
 - 45 m for protection level III;
 - 60 m for protection level IV;
- Δ (m) Δ = Δ T x 10⁶; Δ T (μ s) being the efficiency of the ESE:



ACTIVE 1D+: ELECTRONIC SYSTEM WITH PRIMING DEVICE

PRINCIPLE AND OPERATION

The new Active 1D+ lightning rod is designed for maximum safety during storms. Its modern design, lightweight design, and new advanced performance tests make it the ideal solution for protecting your infrastructure. Its nickel-plated copper tip offers better laboratory results and amplifies its triggering potential thanks to its shape. Designed to withstand extreme weather conditions, it offers great durability and excellent corrosion resistance. In addition, this device requires no power source or specific maintenance, thus ensuring high reliability of the Active 1D+.

The advance of the Active ID+ lightning rod is obtained by the polarization (positive or negative) of its internal device connected to its tip subjected to the storm electric field. As the precursor phenomena of the lightning strike approach, this internal oscillating device is powered by the natural corona effect and brings the tip of the tip to a high voltage potential (> 20kV) in synchronization with the precursor phenomena of the lightning strike. The resulting strong amplification of the ionization at the tip of the lightning rod triggers the early emission of an ascending tracer at the right time for connection with the descending tracer of the cloud and the capture of the lightning strike safely.

Active ID+ technology offers guarantees of optimal performance and repeatability. The requirements and test procedures of Annex C of NF C 17-102: 2011 were strictly observed: complete sequence of consecutive tests on the same lightning conductor. Laboratory efficiency tests revealed a very low dispersion of the lightning rod results (standard deviation) demonstrating optimal repeatability of its starting device. Insulation against extreme weather conditions (heavy rain) has been reinforced, providing reliability of the protection zone. Franklin France exceeds regulatory requirements with major certifications. All tests and trials carried out on the Active ID+ were inspected by Bureau Veritas, which validated and certified its effectiveness.

| MODEL | TIME | HEIGHT | REFERENCE | COUNTER | WEIGHT |
|--------------|-------|---------|-----------|--------------|---------|
| ACTIVE 1D+12 | 12 µs | 0,490 m | AFB20121D | not included | 2,13 kg |
| ACTIVE 1D+12 | 12 μs | 0,490 m | AFB27121D | included | 2,63 kg |
| ACTIVE 1D+25 | 25 μs | 0,490 m | AFB20251D | not included | 2,13 kg |
| ACTIVE 1D+25 | 25 μs | 0,490 m | AFB27251D | included | 2,63 kg |
| ACTIVE 1D+45 | 45 µs | 0,490 m | AFB20451D | not included | 2,13 kg |
| ACTIVE 1D+45 | 45 µs | 0,490 m | AFB27451D | included | 2,63 kg |
| ACTIVE 1D+60 | 60 µs | 0,490 m | AFB20601D | not included | 2,13 kg |
| ACTIVE 1D+60 | 60 µs | 0,490 m | AFB27601D | included | 2,63 kg |



ACTIVE 2D®: ELECTRONIC SYSTEM WITH DOUBLE PRIMING DEVICE

PRINCIPLE AND OPERATION

The operating principle of the Active 2D® lightning rod consists, not only, of initiating the ascending tracer, but above all, of providing it with the energy necessary to ensure its propagation to the junction with the descending tracer.

- A first device, called " PULSE DEVICE", stores the electrostatic energy present in the atmosphere when a storm cloud approaches and triggers the initiation of the ascending discharge at the appropriate time.
- A second device, called "BOOSTER", allows solar energy to be collected and stored in power capacitors. The Active 2D® lightning rod is thus permanently pre-charged with significant energy which allows it to support the propagation of the ascending tracer.

When storm activity approaches, an integrated sensor measuring the value of the ambient electric field triggers the impulse device like most lightning rods with a standard Eurly Streamer Emission device. This causes an almost instantaneous reversal of the polarity of the head of the lightning rod, leading to a sudden amplification of the electric field on its tip. The innovation comes from the use of a second integrated sensor which measures the intensity of the current of the electrical discharge which forms on the tip of the lightning rod. When the descending tracer enters the protection zone of the lightning rod, the measured current increases sharply. As soon as this current is greater than a characteristic threshold, the power capacitors discharge and release the energy necessary for the propagation of the tracer. In this last device, the head of the lightning rod plays the role of capture organ. It is, therefore, electrically isolated from earth.

The Active 2D® lightning rod was tested at the Bazet Test Center (CEB) in accordance with the NFC 17-102 standard and is the subject of an on-site testing campaign. The ignition advance of the Active 2D® lightning rod was determined in relation to a reference point obtained by short-circuiting the double device of this lightning rod.

The Active 2D® lightning rod can be tested on site using its remote tester box and/or with the wired tester (AFV0050TT, AFV 0101TT, AFV0200TT). Test reports are available on request.

| MODEL | TIME | HEIGHT | REFERENCE | COUNTER | TESTER | WEIGHT | DIMENSIONS |
|--------------|-------|--------|-----------|--------------|--------------|--------|-------------------|
| ACTIVE 2D®30 | 30 µs | 1 m | AFB10302D | not included | not included | 6.9 kg | 320x320x500 mm |
| ACTIVE 2D®60 | 60 µs | 1 m | AFB10602D | not included | not included | 6.9 kg | 320x320x500 mm |
| ACTIVE 2D®30 | 30 µs | 1 m | AFB17302D | included | not included | 6.9 kg | 320x320x500 mm |
| ACTIVE 2D®60 | 60 µs | 1 m | AFB17602D | included | not included | 6.9 kg | 320x320x500 mm |
| ACTIVE 2D®30 | 30 µs | 1 m | AFB18302D | not included | included | 6.9 kg | 320x320x500 mm |
| ACTIVE 2D®60 | 60 µs | 1 m | AFB18602D | not included | included | 6.9 kg | 320x320x500 mm |



WIRED TESTER FOR ACTIVE 1D+/2D®

Active 1D® and Active 2D® lightning rods can be tested on site with the AFV0050TT wired test box (compliant with standard NFC 17–102). Simple and quick, this test can be carried out either by removing the lightning rod or by using the telescopic pole (AFV0087PT), which allows it to be reached up to 8 meters. This tester is powered by a battery (provided). The indicator light display instantly indicates the result obtained (positive or negative).

REMOTE TESTER FOR ACTIVE 2D®

The Active 2D® lightning rod can be tested on site with its remote tester, without requiring dismantling (compliant with standard NFC 17–102). The tests are carried out safely from the ground, thanks to radio wave communication. The Active 2D® and its tester are equipped with a transmitter/receiver for two-way communications. The tester runs on a supplied battery and instantly displays results (positive or negative) using LEDs.

| REFERENCES | DESIGNATION | WEIGHT | DIMENSIONS |
|------------|--|----------|--------------------|
| AFV0050TT | Active 1D+ and Active 2D® wired tester | 0,325 kg | 80 x 200 x 40 mm |
| AFV0087PT | Active 1D+ and Active 2D® telescopic test pole | 3,6 kg | 1850 x Ømax 100 mm |
| AFV0101TT | Active 2D® Remote Tester | 0,18 kg | 65 x 130 x 25 mm |







AFV0087PT

MULTITESTER FOR ACTIVE 2D®

The Active 2D® lightning rod multitester allows you to check several lightning rods on the same site or on different sites.

AFV0050TT

The Active 2D® Multitester pack includes:

- · A laptop for greater user comfort,
- The LMS MULTI 2D software (Lightning Monitoring System MULTI 2D) pre-installed in the factory,
- An Activ'control (communication box between the lightning rod and the software to collect information),
- The different connectors (RJ45 connector => USB, power supply),
- Programming of Active 2D® serial numbers (up to 5 factory serial numbers included).



AFV0101TT

ACTIVE 4D® CENTRALE DE PROTECTION

PRINCIPLE AND OPERATION

The innovation of the Active 4D® central unit is to offer a complete lightning protection system, permanently connected with users.

- The Lightning Rod part uses the latest technologies for its excitation advance.
- The Detection part uses the patented system with a sensor (electrostatic and electromagnetic) to inform of the arrival of a storm.
- The Counter part informs in real time of any impact on the Active 4D® by giving all the characteristics and currents.
- The LMS software makes it possible to group together, in real time, all the information related to lightning phenomena on the site.

Thanks to the connected system, if the user wishes, it is possible to have access to their data anywhere in the world.

The operating principle of the lightning rod part of the Active 4D® consists not only of initiating the ascending tracer, but above all, of providing it with the energy necessary to ensure its propagation to the junction with the descending tracer. The Active 4D® lightning rod system is equivalent to the Active 2D® lightning rod, having 2 devices: "impulse" and "booster".

The operating system can be continuously tested, either using a remote radio tester or electronically using the Activ'Control® box and the LMS (Lightning Monitoring System) software. 2 priming advances are offered by this product depending on the models: 30 and 60 µs. The system has been tested in accordance with the NFC 17-102 standard of September 2011 in an independent laboratory.

Active 4D® allows lightning strikes to be counted autonomously on the installation. The innovation comes from the integration of the counting system directly within this plant. This lightning strike counter allows you to time stamp and store the various impact information captured by the control unit (number of impacts, day/time of each impact, the value, form and energy of the lightning current).

This data is then transferred to the Activ'Control® by radio. The operator, thanks to the LMS software, can permanently access the various data and visualize the lightning current curves. This device complies with the decree of July 19, 2011 and standard NF EN 62561-6.

Active 4D® allows you to predict the arrival of a storm. Detection is done using an integrated sensor which precisely measures the value of the electromagnetic field. As soon as the recorded value indicates an imminent risk of lightning, the Active 4D®, thanks to its dry contact on the Activ'Control® box, takes the initiative of sending audible (siren, etc.) and/or visual alerts (beacon, etc.).

The LMS (Lightning Monitoring System) software, permanently connected to Activ'Control®, allows you to visualize the evolution of the risk and configure the detection thresholds. The great innovation of the system (patented) was to integrate prevention with protection against lightning.

| MODEL | TIME | HEIGHT | REFERENCES | ACTIV'CONTROL (AFV2000TT) |
|--------------|-------|--------|------------|------------------------------|
| ACTIVE 4D®30 | 30 μs | 1 m | AFB18304D | included |
| ACTIVE 4D®60 | 60 μs | 1 m | AFB18604D | included |
| ACTIVE 4D®30 | 30 μs | 1 m | AFB10304D | not included |
| ACTIVE 4D®60 | 60 µs | 1 m | AFB10604D | not included |

"FRANKLIN TYPE" SINGLE ROD LIGHTNING RODS

These lightning rods offer a protection radius of between 5.5m and 31.10m depending on the height and level of protection (protection angles can be provided on request). These lightning rods are designed to withstand wind speeds of up to 160 km/h without guying. They can be fixed using all of the mounting brackets from the Franklin France range as well as the 2 tripod models. Comes with an AFJ3100SE collar.

| REFERENCES | DESIGNATION | NATURE | HEIGHT | DIAMETER | NUMBER OF EXTENSIONS | WEIGHT |
|------------|----------------------------------|--------------------------|--------|----------|-------------------------|---------|
| AFA2001PF | Lightning rod Franklin France | Stainless steel 304 L | 2 m | 30 mm | - | 5 kg |
| AFA4001PF | Lightning rod Franklin France | Stainless steel 304 L | 4 m | 34 mm | 1 | 10,2 kg |
| AFA6001PF | Lightning rod Franklin France | Stainless steel 304 L | 6 m | 34 mm | 2 | 16,5 kg |





ELECTROMECHANICAL AND DIGITAL COUNTERS

Impact count or lightning counters are intended to detect and count lightning strikes received by structures equipped with lightning rods. Compulsory counter for classified sites, recommended for assessments by Insurance Companies.

The AFV1007CF counter is completely autonomous and does not require an external power supply.

The AFV0909CF time stamp counter indicates the date and time of the current shocks passing through the down conductor. The battery used is included (3.6V Lithium battery). No readings are lost when replacing batteries. Even if the batteries wear out and there is no display, measurements can be acquired normally.

| REFERENCES | AFV0920CF | AFV1007CF | AFV0909CF |
|------------------------------------|---|---|------------------------------|
| Designation | Digital counter | Electromechanical counter | Time-stamped digital counter |
| Display | 00 > 999 | 00 > 999999 | 00 > 999 |
| Detection limit | 1 kA - 8/20 (onde) | 1 kA - 8/20 (onde) | 1 kA - 8/20 (onde) |
| Maximum discharge current detected | 100 kA - 10/350 μs (wave) | 100 kA - 10/350 μs (wave) | 100 kA - 10/350 μs (wave) |
| Input and output conductors | Ø8 mm (50mm²) / strip 27x2 mm to 30x3 mm | Ø 8 to 10mm and 30x2 ribbon and 30x3 mm | Ø 8 mm / feuillard 30x2 mm |
| Operating temperature | - | -10°C/+ 60°C | - 30 °C / + 80 °C |
| Protection sign | IP66/67 | IP65 | IP67 |
| Dimensions | 100 x 100 x 75 mm | 150 x 60 x 50 mm | 100x 100 x 75 mm |
| Weight | 600 g | 530 g | 560 g |





EXTENSION MASTS FOR LIGHTNING RODS

The "Franklin" extension masts fit together by overlapping. Each mast consists of a stainless steel tube, a fitting and four conductor mounting clamps. Very strong, it is possible to combine 3 masts without guying for a wind speed of up to 160 km/h in extreme conditions.

| REFERENCES | DESIGNATION | NATURE | HEIGHT | DIAMETER | ELEMENT | WEIGHT |
|------------|------------------------------------|--------------------------|--------|----------|---------|---------|
| AFC0034MR | Self-extending mast | Stainless steel 304 L | 2 m | 34 mm | 1 | 6,1 kg |
| AFC3434MR | Sleeve-ment | Stainless steel 304 L | 0,31 m | 28 mm | 1 | 1,40 kg |
| AFC0042MR | Self-extending mast | Stainless steel 304 L | 2 m | 42 mm | 1 | 8 kg |
| AFC1014MR | Threaded mast | Stainless steel 304 L | 2 m | 34 mm | 1 | 4,5 kg |
| AFC5001MR | Elbow bracket for lightning rod | Stainless steel 304 L | 2 m | 30 mm | 1 | 3 kg |
| AFC5002MR | Elbow bracket for lightning rod | Stainless steel 304 L | 2 m | 33,7 mm | 1 | 3,8 kg |
| AFC1035MR | Self-extending mast | Galvanized steel | 2 m | 35 mm | 1 | 3,25 kg |
| AFC2042MR | Self-extending mast | Galvanized steel | 2 m | 42 mm | 1 | 5 kg |

AFC0034MR

AFC3434MR

WATER DISCHARGE CONES

Their base, in reinforced aluminum alloy, forming the sole, allows them to adapt to different shapes of structures while ensuring waterproofing.

| REFERENCES | DESIGNATION | NATURE | OBSERVATION | MAST DIAMETER | WEIGHT |
|------------|-------------------------|-------------------|-------------|----------------------|----------|
| AFD5001CE | Water discharge cone | EPDM aluminium | 6 > 70 | 114 x 114 x 55 mm | 0,070 kg |
| AFD5002CE | Water discharge cone | EPDM aluminium | 6 > 146 | 203 x 203 x 85 mm | 0,180 kg |



AFD5001CE

THREADED BASE

Fixing only ESEs and lightning rods with Franklin rods (excluding extension poles) on pylons and metal frames.







TRIPODS

Made of galvanized steel, they can accommodate all lightning rods as well as their mast's support with a maximum diameter of \varnothing 50 mm. The type of tripod as well as the number of slabs will be defined according to the configuration of the building to be protected as well as the wind region.

| REFERENCES | DESIGNATION | HEIGHT | FIXATION PIED | CENTER DISTANCE | WEIGHT |
|------------|----------------------|---------------|---------------|--------------------|--------|
| AFD3200FS | Universal tripod | 800 mm | M 10 max. | 385 mm | 6 kg |
| AFD3300FS | Telescopic tripod | 600 > 2170 mm | M 10 max. | 2238 > 3944 | 30 kg |
| AFH8045DA | Ballast slab | 110 mm | M 10 max. | 400 x 400 | 25 kg |





| AFD3300FS - NUMBER OF TILES PER FOOT | | | | | | |
|--------------------------------------|---------------|---------------------------|----------------------------|----------------------------|--|--|
| CONFIGURATION | LIGHTNING ROD | LIGHTNING ROD + 1 MAST | LIGHTNING ROD + 2 MASTS | LIGHTNING ROD + 3 MASTS | | |
| 1 | 1 | 1 | 1 | 2 | | |
| 2 | 1 | 1 | 1 | 2 | | |
| 3 | 1 | 1 | 2 | 3 | | |
| 4 | 1 | 1 | 2 | 3 | | |
| 5 | 1 | 1 | 3 | 5 | | |



STRAPPING

Straps are generally used for fixing lightning rods and their mast's support to chimneys, concrete masts, etc.




| REFERENCES | DESIGNATION | NATURE | CLAMPING DIAMETER | OBSERVATION | WEIGHT |
|------------|--------------------|---------------------------------|----------------------|--------------------------------|--------|
| AFZ2012PS | Strapping tab | Dichromate zinc plated steel | 25 > 60 mm | For lightning rods or masts | 0,9 kg |
| AFD2011PS | Strapping 40 mm | Galvanized steel | - | Roll 5 m | 1 kg |

MOUNTING BRACKETS

Fixing brackets for the installation of lightning rods alone or equipped with extension masts (2 brackets if lightning rod alone or equipped with an extension mast, 3 brackets if 2 or 3 extension masts). Recommended spacing between legs: 40cm.



| Recommended spacing between legs: 40cm. | | | | | |
|---|-------------------------------------|---------------------|----------------------|---|---------|
| REFERENCES | DESIGNATION | NATURE | CLAMPING DIAMETER | INTEREST | WEIGHT |
| AFZ0414PD | "Offset" leg 220 mm | Galvanized steel | 30 > 50 mm | Fixing by bolt, bolting, strapping | 1,44 kg |
| AFZ0514PD | "Offset" leg 310 mm | Galvanized steel | 30 > 50 mm | Fixing by bolt, bolting, strapping | 1,68 kg |
| AFZ0614PD | "Offset" leg 220 mm | Stainless steel | 30 > 50 mm | Fixing by bolt, bolting, strapping | 1,37 kg |
| AFZ0815PD | "Offset" leg 500 mm | Galvanized steel | 30 > 50 mm | Fixing by bolt, bolting, strapping | 6,77 kg |
| AFZ0412SL | SL Paw | Galvanized steel | 30 > 50 mm | Offset fixing of pylons, tub. vertical, metal frames | 1,82 kg |
| AFZ0513SL | SL Paw | Galvanized steel | 30 > 114 mm | Offset fixing of pylons, tub. vertical, metal frames | 2,27 kg |
| AFZ0417FC | X-shaped attachment | Galvanized steel | 30 > 50 mm | Offset fixing of pylons, tub. vertical, metal frames | 1,48 kg |
| AFD1270PB | Platinum cladding | Aluminium | - | Fixing by rivet or screw | 1,03 kg |
| AFZ2802FU | Fixing tab. universal | Galvanized steel | 33 > 49 mm | Fixing by dowels, strapping | 1,08 kg |
| AFZ2008PS | Side sealing bracket 400 mm | Galvanized steel | 33 > 50 mm | - | 1,46 kg |
| AFZ0420PD | Fixing tab. cladding crossing | Galvanized steel | 33 > 49 mm | Fixing by dowels or bolting | 1,30 kg |



SENSOR TIPS

Their base has a thread or tapping for their fixing by bolt, dowel, bolting, on all materials.

| REFERENCES | DESIGNATION | NATURE | HEIGHT | DIAMETER | WEIGHT |
|------------|----------------------|-----------------|--------|----------|---------|
| AFE1050PC | Sensor tip | Stainless steel | 0,5 m | M 10 | 1 kg |
| AFEI100PC | Tapped sensor tip | Stainless steel | 1 m | M 10 | 2,2 kg |
| AFE1101PC | Threaded sensor tip | Stainless steel | 1 m | M16 | 2,25 kg |
| AFE1200PC | Sensor tip | Stainless steel | 2 m | M20 | 5 kg |

ATTACHING THE SENSOR TIPS

Threaded rods, support lag screws, expanding studs are delivered with sealing collar.

| REFERENCES | DESIGNATION | NATURE | LENGTH | FIXATION | DRILLING DIAMETER | WEIGHT |
|------------|-----------------------|-------------------------|----------------------|----------|----------------------|--------|
| AFF2025PC | Threaded shaft | Galvanized steel | 100 mm | M 10 mm | - | 80 g |
| AFF2026PC | Support tire- fond | Galvanized steel | 140 mm | M 10 mm | - | 65 g |
| AFF2030PC | Expansive Stud | Dichromate steel | 85 mm | M 10 mm | 12 x 60 mm | 45 g |
| AFF0836PC | Square support | Tin-plated brass | 50/50 x 30 x 5 mm | M 10 mm | - | 120 g |
| AFF0834PC | Tip plate support | White zinc plated steel | 90 x 90 mm | M 10 mm | - | 246 g |
| AFF0835PC | Tip plate support | White zinc plated steel | 65 x 65 mm | M 10 mm | - | 76 g |



AFF0836PC



"TIP SUPPORT" BASES

The tip support crossing base acts as a connection and fixing for the sensor tips.



| REFERENCE | DESIGNATION | NATURE | HEIGHT | DIAMETER | WEIGHT |
|-----------|---------------------------|------------------------------|-----------------|----------|--------|
| AFF0503PC | Embase « support pointe » | Cupro aluminum. tinned | 53 x 53 x 14 mm | M 10 | 220 g |

FLAT CONDUCTORS

Conductors for the flow of lightning current and/or equipotential connections (NF EN 62561-2).



| | • | , | | | |
|------------|---|---------------------|-------------|----------|---------|
| REFERENCES | DESIGNATION | NATURE | DIMENSION | SECTION | WEIGHT |
| AFG0253CP | Flat conductor (per 50 m) | Tinned copper | 25 x 3 mm | 75 mm² | 660 g/m |
| AFG0254CP | Flat conductor (per 50 m) | Bare copper | 25 x 3 mm | 75 mm² | 660 g/m |
| AFG0300CP | Flat conductor (per 50 m) | Bare copper | 27 x 2 mm | > 50 mm² | 480 g/m |
| AFG0302CP | Flat conductor (per 50/80 m) | Tinned copper | 27 x 2 mm | > 50 mm² | 480 g/m |
| AFG0320CP | Flat conductor (per 50/80 m) | Tinned copper | 30 x 2 mm | > 50 mm² | 534 g/m |
| AFG4303CP | Flat conductor | Aluminium | 30 x 3 mm | 90 mm² | 240 g/m |
| AFG2333CP | Ribbon 33.5/3 (per 50 m) | Galvanized steel | 33,5 x 3 mm | 100 mm² | 810 g/m |
| AFG6303CP | Flat conductor under PVC | Bare copper | 25 x 3 mm | > 50 mm² | 250 g/m |
| AFG1012CP | Stainless steel ribbon. 30/2 (per 50 m) | Stainless steel | 30 x 2 mm | > 50 mm² | 480 g/m |

ROUND CONDUCTORS

Conductors for the flow of lightning current and/or equipotential connections (NF EN 62561-2).





| REFERENCES | DESIGNATION | NATURE | DIMENSION | SECTION | WEIGHT |
|------------|----------------------------------|-------------------|-----------|----------|----------|
| AFG0028CR | Round conductor (per 80 m) | Bare copper | Ø 8 mm | > 50 mm² | 440 g/m |
| AFG0018CR | Round conductor (per 25 m) | Bare copper | Ø 8 mm | > 50 mm² | 440 g/m |
| AFG0008CR | Round conductor (per 70 m) | Tinned copper | Ø8mm | > 50 mm² | 440 g/m |
| AFG2008CR | Round steel conductor | Galvanized steel. | Ø8mm | > 50 mm² | 390 g/m |
| AFG2018CR | Round conductor | Stainless steel. | Ø8 mm | > 50 mm² | 330 g/m |
| AFG0008BC | 3 m bar | Stainless steel. | Ø8 mm | > 50 mm² | 1350 g/m |

FLEXIBLE BRAIDS AND MULTI-STRAND **CONDUCTORS**

For creating equipotential connections of metal masses.



Other dimensions on request.

AFG5038CR

ELBOW ON PREFORMED EDGE

The preformed edge bend in tinned copper strip complies with the NF EN 62561-2 standard, making it possible to avoid sudden bends on the down conductors to earth.

| REFERENCE | DESIGNATION | NATURE | DIMENSIONS (MM) | LENGTH X RADIUS (CM) | WEIGHT |
|-----------|-------------------------------|------------------|-----------------|-------------------------|--------|
| AFG0030CC | Elbow on preformed edge | Tinned copper | 27 x 2 mm | 70 x 3 cm | 270 g |

SHUNTS

Shunts are used to connect metal masses to down conductors.

| REFERENCES | DESIGNATION | NATURE | DIMENSION | SECTION | WEIGHT |
|------------|---|------------------|-----------|---------|--------|
| AFG0130ST | Shunt tresse souple plate 250 mm | Tinned copper | 30 x 3 mm | 50 mm² | 150 g |
| AFG0230ST | Shunt tresse souple plate 500 mm | Tinned copper | 30 x 3 mm | 50 mm² | 250 g |
| AFG0330ST | Shunt tresse souple plate 750 mm | Tinned copper | 30 x 3 mm | 50 mm² | 380 g |
| AFG0430ST | Shunt tresse souple plate 1000 mm | Tinned copper | 30 x 3 mm | 50 mm² | 510 g |

Other dimensions on request.



AFG0303CS





AFG0230ST



CLAMPS MASONRY



Clamps are used to fix flat conductors to masonry walls (concrete or bricks). They are used with dowels.

| | AFH2U3UCM |
|---|------------|
| | |
| | AFH2030CC |
| | AFH2030CMA |
| (| AFH8030CC |

| REFERENCES | DESIGNATION | NATURE | LENGTH | WEIGHT |
|------------|------------------------------------|------------------|--------|--------|
| AFH2030CM | Masonry clamp for 30 mm tape | the burdens | 50 mm | 11 g |
| AFH2030CC | Ankle for AFH2030CM crampon | Plastic | 40 mm | 26 g |
| AFH2030CMA | Masonry clamp for 30 mm tape | the burdens | 40 mm | 18 g |
| AFH8030CC | Ankle for AFH2030CMA crampon | Plastic | 40 mm | 15 g |
| AFH2031CM | Masonry clamp for 30 mm tape | Galvanized steel | 30 mm | - |

STAPLES



Staples are used to fix flat conductors on tiled or slate roofs.



| REFERENCES | DESIGNATION | NATURE | LENGTH | WEIGHT |
|------------|---------------------|---------------|--------|--------|
| AFH0030AM | Flat staple on tile | Tinned copper | 200 mm | 40 g |
| AFH0031AM | Flat staple on tile | Tinned copper | 100 mm | 26 g |

BRIDES

The flanges are used to fix flat conductors to zinc cladding or roofing by welding.



| REFERENCE | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|-----------|-----------------------------|---------------|-----------|--------|
| AFH0030BF | Fixing flange for zinc roof | Tinned copper | - | 6 g |

AFH7000AC

COLLARS

These clamps allow flat conductors to be fixed to any type of support, favoring concrete and wood supports. Delivered with M7 x 40 steel wood screws.

| REFERENCE | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|-----------|--------------------|--------|------------|--------|
| AFH7000AC | Flat fixing collar | Brass | 50 x 16 mm | 26 g |



AFH2000AC

FASTENERS FOR ANGLES, PYLONS, METAL FRAMES

These fasteners allow flat and round conductors to be fixed to metal supports such as angles, pylons or metal frames. They can also be used to make equipotential connections of metallic masses.

| REFERENCE | DESIGNATION | DESIGNATION NATURE | | WEIGHT |
|-----------|--|--------------------|----------------------------|--------|
| AFH2000AC | Framing fastener for round Ø 8 or 10 | Galvanized steel. | Thickness 10 mm max. | 105 g |
| AFH2001AC | Framing fastener for flat 30 x 2 | Galvanized steel. | Thickness 10 mm max. | 105 g |
| AFH2006AC | Framing fastener for flat | Galvanized steel | Thickness 14 to 20 mm max. | 16 g |



AFH2001AC

GUTTER PASSAGES

These connections allow the rainwater to be interconnected with the down conductor without any drilling.



AFH2002PG

| REFERENCE | DESIGNATION | NATURE | DRIVER | WEIGHT |
|-----------|----------------|------------------|-------------------------------|--------|
| AFH2002PG | Gutter passage | Galvanized steel | Plate 30 mm+ round Ø 10 mm | 194 g |
| AFH2005PG | Gutter passage | Steel/copper | Plate 30 mm+ round Ø 10 mm | 200 g |



AFH1052CS



AFH1053CS



AFH1054CS



AFH1057CS

CLAMPS

These collars allow the down conductors to be held at the level of extension masts from the Franklin France range and all types of cylindrical elements for a clamping diameter of 8 to 160 mm.

| REFERENCES | DESIGNATION | NATURE | LENGTH | CLAMPING DIAMETER | WEIGHT |
|------------|-------------|-----------------|--------|----------------------|--------|
| AFH1051CS | Screw clamp | Stainless steel | 8 mm | 25 > 45 mm | 25 g |
| AFH1052CS | Screw clamp | Stainless steel | 14 mm | 35 > 52 mm | 26 g |
| AFH1053CS | Screw clamp | Stainless steel | 8 mm | 47 > 67 mm | 30 g |
| AFH1054CS | Screw clamp | Stainless steel | 8 mm | 62 > 82 mm | 32 g |
| AFH1057CS | Ball clamp | Stainless steel | 8 mm | 8 > 100 mm | 8 g |
| AFH1058CS | Ball clamp | Stainless steel | 8 mm | 8 > 160 mm | 14 g |

CLIPS INOX

The stainless steel clips allow you to fix the strip type conductors to any type of support using a Ø4mm waterproof pop rivet (AFH0075RP), an expansion plug (AFH8050CE), a Ø3.9mm self-drilling screw, a bolt or a max. Ø4mm screw.



AFH6501CL

AFH6050CL

| REFERENCES | DESIGNATION | OBSERVATION | WEIGHT |
|------------|---|---------------------------|--------|
| AFH6050CL | Stainless steel clip 26 x 15 mm for flat 27 x 2 mm | Fixing hole Ø 4 mm | 2 g |
| AFH6501CL | Zinc-plated steel clips for Ø 8 round on flat support | Thickness 7 to 11 mm max. | 2 g |
| AFH6502CL | Stainless steel clip. for flat 30x2 and 30x3 | Fixing hole Ø 4 mm | 2 g |
| AFH6503CL | Stainless steel clip. for flat 33.5 x 3 | Fixing hole Ø 4 mm | 2 g |

EXPANDING RIVETS





| REFERENCES | DESIGNATION | NATURE | DIMENSION | THICKNESS | WEIGHT |
|------------|---------------------------------------|----------------|---------------|-----------|--------|
| AFH0075RP | Aluminum waterproof Pop rivet | Aluminium | Ø 4 x 12,5 mm | - | 2 g |
| AFH0175RN | Vulca washers | Aluminium | Ø 10 mm | 2 mm | 2 g |
| AFH8050CE | Waterproof anchor with M4 screw | Steel / rubber | Ø 8 x 24 mm | - | 33 g |

CEMENT PADS "CONDUCTOR SUPPORT"



AFH8039PC



AFH8038PC

These studs allow flat (27x2 to 33.5x3) or round (Ø8 and 10) conductors to be fixed to the roof without compromising the waterproofing. They can also be installed on green or gravel roofs. This solution also facilitates maintenance or replacement of seals.

| REFERENCES | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|------------|--|------------------------|-------------------|--------|
| AFH8038PC | Universal concrete pad | Concrete + plastic | 98 x 98 x 75,5 mm | 1 kg |
| AFH8039PC | Cement support pad for round or flat conductor with clip | Polypropylene + cement | 140 x 140 x 80 mm | 1 kg |
| AFH8040PC | Cement support pad without the fastener | Polypropylene + cement | 140 x 140 x 80 mm | 1 kg |
| AFH8041PC | Pedestal to be cemented with the fastener | Polypropylene | 140 x 140 x 80 mm | 80 g |

UNIVERSAL PLASTIC FASTENERS



AFH6415AC



AFH6416AC



AFH6406AC



AFH6407AC

These clips are intended for fixing conductors to all types of materials.

| REFERENCES | DESIGNATION OBSERVATION | | WEIGHT |
|------------|--|-----------------------------|--------|
| AFH6414AC | Attachment for flat 30 mm "sole" height 14 mm | For flat or round conductor | 23 g |
| AFH6415AC | Attachment for flat 30 mm "ankle" height 14 mm | For flat or round conductor | 23 g |
| AFH6416AC | Attachment for 30 mm flat "support" height 24 mm | For flat or round conductor | 23 g |
| AFH6405AC | Locking clip without height sole 18 mm | For round conductor Ø 8 mm | 8 g |
| AFH6406AC | Height "sole" locking clip 18 mm | For round conductor Ø 8 mm | 10 g |
| AFH6407AC | Height "ankle" locking clip 18 mm | For round conductor Ø 8 mm | 10 g |
| AFH6408AC | Height "support" locking clip 25 mm | Diameter 10 mm max. | 10 g |





ATTACHMENT SUPPORT ACCESSORIES

These fixings are used to hold conductors on tiled or slate roofs with the AFH6414AC and AFH6406AC fastening models.

| REFERENCES | DESIGNATION | NATURE | OBSERVATION | WEIGHT |
|------------|------------------------------------|-------------------------|--------------------------------------|--------|
| AFH6418CT | Tile or slate hook | White zinc plated steel | Length 44cm | 93 g |
| AFH6419GT | Tile or slate slide (to be nailed) | White zinc plated steel | Length 23 cm | 40 g |
| AFH6420GT | Tile or slate slide (to be fitted) | White zinc plated steel | Length 40cm | 74 g |
| AFH6421CB | Hook for bolt M 8 x | White zinc plated steel | For corrugated sheet roofing | 10 g |
| AFH6422AF | Ridge hook | White zinc plated steel | 1/2 circle adjustment 17/24 cm | 74 g |



CONDUCTIVE FITTINGS

These fittings are used to make connections between down conductors, mesh or equipotential connections, by mechanical tightening. They allow up to 4 conductors to be connected.

| To the state of th | AFJ0819RL |
|--|-----------|

| REFERENCES | DESIGNATION | NATURE | OBSERVATION | WEIGHT |
|------------|-------------------------------------|---------------------------|---|--------|
| AFJ0005RC | "flat-flat" crossover connection | Cupro aluminum. tinned | For 30 mm flat | 218 g |
| AFJ0819RL | "Flat-round" connection | Stainless steel | For flat 25 to 33,5mm and round diameter 8 and 10 mm | 100 g |

These lugs are mainly used to make connections between different

DIMENSION

TIGHTENING

2 x M5

4 x M5

40 g

76 g

LUGS - CABLE CLAMPS FOR COPPER LINES



AFH1650CC

REFERENCES DESIGNATION



AFH1650CC Cable lug Brass 43 x 21 mm 6 > 50 mm² AFH2650CC Double AFH2650CC Brass 64 x 21 mm 6 > 50 mm² terminal

earth networks and/or with a metal structure.

NATURE

Cable 28 x 29 x 34 AFH1050SC Brass 10 > 50 mm² 2 x M6 clamps mm Cable 36 x 39 x 46 AFH1695SC 16 > 95 mm² 154 g 2 X M8 Brass clamps

38



AFK0080BC

CONTROL JUNCTION

A control junction (cut-off terminal) must be inserted on each down conductor to enable them to be isolated from the earth network. It is in principle to be installed between the protective sheath (AFK4200FP) and the lightning meters (AFV1007CF, AFV0920CF, AFV0909CF).

| REFERENCE | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|-----------|--------------------------|---------------------------|-----------------|--------|
| AFK0080BC | Ground breaking terminal | Cupro aluminum. tinned | 70 x 37 x 20 mm | 360 g |

PROTECTIVE TUBE

It allows the protection of down conductors against mechanical shock over a height of 2 meters. It is to be placed between the control junction (AFK0080BC) and the inspection window (AFK8001RV) or the equipotential bonding bar (AFK0020BE). It comes with 3 AFK4203CF clamps.

| REFERENCES | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|------------|--|------------------|------------------|---------|
| AFK4200FP | Protective sheath for flat conductor 30 mm | Galvanized steel | 40 x 4 x 2000 mm | 1,26 kg |
| AFK4204FP | Protective sheath for flat conductor 30 mm | Stainless steel | 40 x 4 x 2000 mm | 830 g |
| AFK4201FP | Tubular protective sheath | Dichromate steel | Ø 20 x 2000 mm | 2,18 kg |
| AFK4203CF | Fixing collar for AFK4200FP or AFK4204FP | Stainless steel | 40 x 4 x 2000 mm | 830 g |

MULTI-STRAND CONNECTION



AFK0004RM

This connector is used to connect the 3 branches of the crow's feet. However, it is possible to connect more than 3 conductors.


| REFERENCE | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|-----------|------------------------------|--------------|-----------------|--------|
| AFK0004RM | "Multi-strand" connection | Copper alloy | 80 x 80 x 20 mm | 930 g |

EARTH GRIDS

They allow the creation and/or improvement of lightning earthing. Each grid is made up of 115 x 40 mm mesh.

| REFERENCES | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|------------|---|--------|----------------|---------|
| AFK0900GT | "Copper" earth grid + adhesive strip | Copper | 920 x 660 mm | 2,64 kg |
| AFK0901GT | "Copper" earth grid | Copper | 2000 x 1000 mm | 7 kg |







AFK8001RV

INSPECTION PIT

The inspection pit should be placed in the lower part of each down conductor. It allows the disconnection of the lightning earth connection, the down conductor and the equipotential connection with the general earth network of the site (excavation bottom, TGBT, etc.).

| REFERENCES | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|------------|--------------------|------------|--------------|--------|
| AFK8001RV | Inspection manhole | Source | Ø 230 mm | 4,9 kg |
| AFK8007RV | Inspection manhole | Fiber cast | 300 X 300 mm | 8,3 kg |





AFK8007RV



AFK2020BE

AFK0420PT

COPPER - EARTH RODS

The rods are used to create lightning or electrical earth connections. They are self-extending by elements. The bore at the rods head is pre-greased, the interlocking element is knurled, which allows interlocking and lasting contact. The use of a suitable striking head makes it possible to drive the rods without damaging the technical and functional parts. Driving by mechanical percussion with an electric or thermal hammer is necessary as soon as a certain number of rods must be installed and/or for deep installations.

| REFERENCES | DESIGNATION | DIAMETER | LENGTH | WEIGHT |
|------------|---|----------|--------|--------|
| AFK0420PT | Copper-steel stake 250 µm self- extending | 17,4 mm | 1 m | 1,9 kg |
| AFK2020BE | Manual driving pin | - | - | 228 g |



GALVANIZED STEEL EARTH RODS

These non-extendable rods are mainly used for creating electrical earth connections. They are equipped with a connection collar.

| REFERENCES | DESIGNATION | DIAMETER | LENGTH | WEIGHT |
|------------|------------------------|----------|--------|---------|
| AFK0101PT | Galvanized steel stake | 21 mm | 1 m | 1,18 kg |
| AFK0102PT | Galvanized steel stake | 21 mm | 1,5 m | 1,69 kg |

AFK1029PT

STAINLESS STEEL EARTH RODS

These rods are used to create lightning or electrical earth connections. They are self-extending by elements and made of stainless steel tube Ø 16mm. Driving by mechanical percussion with an electric or thermal hammer is necessary as soon as a certain number of rods must be installed and/or for deep installations.

| REFERENCE | DESIGNATION | DIAMETER | LENGTH | WEIGHT |
|-----------|---|----------|--------|---------|
| AFK1029PT | Self-extending stainless steel stake | 16 mm | 1 m | 1,48 kg |
| AFK1031PT | Self-extending stainless steel stake | 16 mm | 1,5 m | 2,25 kg |

CONNECTION COLLAR FOR EARTH RODS




AFK0020RP

Allows the connection of horizontal strip-type electrodes with vertical electrodes.

| REFERENCE | DESIGNATION | DIAMETER | LENGTH | WEIGHT |
|-----------|-------------------------|------------|--------|--------|
| AFK0020RP | Stake connection collar | 16/17,4 mm | - | 150 g |

EQUIPOTENTIALITY BARS AND CLAMPS





AFK0020BE



| REFERENCES | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|------------|---|-----------------|------------------|--------|
| AFK0020BE | Equipotential bar 2 x 8 holes - Ø 10 + insulators | Copper | 200 x 50 x 5 mm | 600 g |
| AFK0125BE | Equipotential bar 70 holes - Ø 10 | Copper | 1750 x 25 x 5 mm | 1,7 kg |
| AFH4000IT | Earth bar insulator | Polyamide | Ø 40 x 40 mm | 100 g |
| AFH8100CE | Clamp for equipotentiality | Stainless steel | Ø 8-32 mm | 46 g |
| AFH8102CE | Clamp for equipotentiality | Stainless steel | Ø 32-100 mm | 50 g |

GROUND COIL

This coil is placed in series on the equipotential connection of two earth connections. For example between a lightning earth connection and the mass earth connection. It increases the link impedance, which, in the case of a short connection, limits the shock effect and the transmission of energy to the electrical distribution while maintaining equipotentiality. It is placed as close as possible to the ground of the masses (accesshole or base of the wall).

| REFERENCE | DESIGNATION | DIMENSION | WEIGHT |
|-----------|-------------|-------------------|--------|
| AFK0001ST | Earth choke | 225 x 68 x 102 mm | 1,33 g |



AFY7600EA

EQUIPOTENTIALITY SPARK PLUGS AND ANTENNA MASTS

The spark plugs ensure the balancing of the potentials of the different earths. To avoid damage and limit risks, it is recommended to insert antenna mast spark gaps on the grounding circuit.



| REFERENCES | AFY7600EA | AFK0112BE | AFK0113EE |
|-------------|---------------|-------------------|--|
| Application | Antennas, TV, | Risk of corrosion | Approximately. explosive, cathodic |



| REFERENCES | AFY7600EA | AFK0112BE | AFK0113EE |
|--|------------------------------|------------------------------|--|
| Application | Antennas, TV, | Risk of corrosion | Approximately. explosive, cathodic protection |
| Nature | Stainless steel + resin | Stainless steel + PVC | Zinc + PVC |
| Discharge current | 100 kA - 10 x (onde 8/20) | 100 kA - 10 x (onde 8/20) | 100 kA - 10 x (onde 8/20) |
| Protection level Up (start-up voltage, wave of 1.2/50) | 1,5 kV | 4 kV | 2,2 kV |
| Connection | By necklaces | Bar Ø 8 mm | 2 x M 10 (230 mm cable) |
| Protection sign | IP65 | IP65 | Ex(s) G4 |
| Dimension | 180 x 50 x 40 mm | Ø 45 x 160 mm | Ø 63 x 90 mm |
| Weight | 350 g | 290 g | 850 g |

NAMEPLATES - LIGHTNING EARTHING MARKERS

Each down conductor and lightning earth connection must be equipped with this nameplate, to prevent a risk of contact or step voltage. It must be readable from 3 meters away and must be installed at reading height.



| REFERENCES | DESIGNATION | NATURE | DIMENSION | WEIGHT |
|------------|-------------------------|-----------|--------------------|--------|
| AFH8000PS | Nameplate | Aluminium | 137 x 137 x 137 mm | 110 g |
| AFH8000GB | Nameplate in English | Aluminium | 137 x 137 x 137 mm | 110 g |

EARTH MEASURER

The AFM2407TL earth measurer is a stand-alone and versatile product that allows you to measure the resistance of an earth connection, but also the resistivity of the ground. This device is delivered with all the equipment necessary for the various measurements.

| REFERENCE | AFM2407TL |
|------------------------------|--|
| Resistance measurement range | 0 - 20 kΩ |
| Resolution | 0.01 Ohm |
| Operating temperature | - 10 °C / + 50 °C |
| Battery | 12 V rechargeable - charger: 220 V / 240 V + "cigarette lighter" |
| Dimension | 221 x 189 x 99 mm |
| Weight | 2 Kg |





GROUND IMPROVER - TEREC+

The TEREC+ ground improver is made of highly conductive materials which increase the efficiency of the earth connection. It is widely used in cases where soil resistivity is high, and in the presence of erosion due to flooding.

| REFERENCE | AFK0040AT |
|-------------|---------------|
| Designation | Soil improver |
| Weight | 15 Kg |






ARGOSWELD® ALUMINOTHERMIC WELDS

ARGOSWELD® aluminothermic welding solutions allow you to connect different types of conductors safely, reliably, simply and quickly (flat conductor, round conductor, reinforcing steel, steel, earth rod, etc.).

The principle consists of bringing together a filler metal and a priming product in a suitable mold.

Under very high temperatures, the copper will melt, then flow inside the mold onto the parts to be welded in order to bond them together.

This system does not require any external power supply.



- A remote electronic igniter equipped with a wired connection to connect it to the capsule, thus ensuring that a safe distance is maintained during use.
- A copper capsule system containing the solder powder. Unlike tubes, it does not require lighting powder. Eco-friendly, this innovation generates less residue.



| REFERENCE | DESIGNATION | NATURE | OBSERVATION | WEIGHT |
|---------------|------------------------------------|-------------------|---------------------|--------|
| ARG0025MA | Filler metal | Powder | - | 25 g |
| ARG00250MA | Filler metal | Powder | - | 250 g |
| ARGBB14253 | BB1 mold 25x3mm straight | Graphite standard | For 80-100 welds | 1,6 kg |
| ARGBR24142253 | BR2 mold 25x3mm + Stake | Graphite standard | For 30 mm flat | 1,6 kg |
| ARGCC2495 | CC2 cable to cable mold 95mm² T | Graphite standard | Pours around 95 mm² | 1,6 kg |
| ARGCR1414216 | Cable mold 16 mm² - 5/8 stake | Graphite standard | Pours around 16 mm² | 1,6 kg |

The soldering kit is delivered with the ignition powder, in tubes or capsules of 25 to 400 grams depending on the type and number of connections desired. In addition, it is possible to have all the accessories for protecting and cleaning the mold (case, gloves, pliers, brush, file, etc.).

| | FLAT AND FLAT | | | | |
|-----|---------------|-----|------|------|--|
| BB1 | BB3 | BB7 | BB14 | BB41 | |
| | | | | | |

| CABLE AND CABLE | | | | | |
|-----------------|-----|-----|-----|------|--|
| CCI | CC2 | CC4 | CC7 | CC14 | |
| | | | | | |

| CABLE AND IRON CONCRETE | | | | | |
|-------------------------|------|------|------|-------|--|
| CRE1 | CRE2 | CRE3 | CRE6 | CRE17 | |
| | | | | | |

| CABLE AND STEEL | | | | | | | |
|-----------------|-----|-----|-----|-----|-----|-------|------|
| CSI | CS2 | CS3 | CS7 | CS8 | CS9 | C\$25 | CS27 |
| | | | | | | | TO |

| | FLAT AND CABLE | |
|-----|--|-----|
| CB1 | CB4 | CB5 |
| | The state of the s | |


| CABLE AND GROUND STAKE | | | | |
|------------------------|-----|-----|--|--|
| CR1 | CR2 | CR3 | | |
| | | | | |

| FLAT AND EARTH STAKE | | | | |
|----------------------|-----|--|--|--|
| BR1 | BR2 | | | |
| | | | | |

| FLAT AND STEEL | | | | |
|----------------|-----|--|--|--|
| BS1 | BS2 | | | |
| | | | | |

SURGE PRODUCTS

RULES OF INSTALLATION

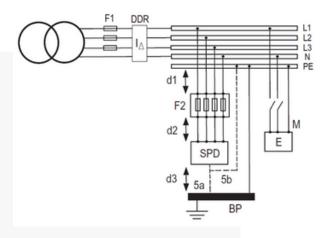

Fl and F2: fuses or circuit breaker

SPD: lightning arrester

BP: main borne de terre

Total length d1 + d2 + d3 < 50 cm or failing that must be as short as possible

- The surge protector will be connected as a short branch to the power supply concerned.
- In addition to the integrated thermal disconnection, protection against end-of-life short circuits will be inserted upstream of the surge arrester connection. The connection diagram will be determined according to whether priority is given to continuity of service or that of protection.
- It is possible to obtain both continuity of service and continuity of protection through the use of several identical surge arresters mounted in parallel and each equipped with a disconnector.
- In association with modular surge arresters, either fuses or circuit breakers will be chosen (the choice of equipment
 will be made according to the manufacturer's data and in order to best respect selectivity). This insertion must take
 into account the number of poles to be protected and the possible short-circuit current at the point considered.
- It is mandatory to provide protection with type I surge arresters if the structure has a lightning protection system (LPS).
- The mandatory conductor section for type 1 surge protectors is 10 mm² and 4 mm² for types 2 and 3.

PROTECTION AGAINST OVERVOLTAGE

The indirect effects of lightning are numerous. This is why it must be faced by protecting all electrical, electronic and computer elements. It is with this in mind that all surge protection products have been created.

Choice of surge protectors:

Common rules valid for all ranges to ensure the safety of people and the operation of products in the best conditions:


- The choice of the protection level Up and the flow current limp depend on the electrical sensitivity and also on the presence or not of a Lightning Protection System (SPF) on the building.
- For Telecoms and coaxial protections, it will be necessary to take into account in addition the Up protection level, the operating frequency (Bandwidth), the attenuation and the voltage of the communications network.
- The choice of surge protector will be made easier by the markings made compulsory by the IEC / NF EN 61-643-11 standard.
- The end of life of surge arresters must be studied so that it is not harmful to the equipment to be protected (need to add cutting elements for energy network surge arresters).


Wiring and grounding:


- The cables will be routed away from other conductors and the earthing will also be as short as possible on the equipotential bar or the cabinet ground.
- We will thus seek to optimize the route of the conductors by ensuring that the arrival wires on the surge protector are clearly distinct from those leaving.
- The feeders protected by a surge arrester will be taken from the terminals of the surge arrester and switching device dedicated to end-of-life protection.
- The total length of the connections, protection device and protection included, must not exceed 50 cm.
- No separate earth connection should exist.
- If in a panel or cabinet, the connection to the general earth is too far away, we will use an intermediate earth terminal block (UTE-C 15 443).
- An earth connection per building or protected installation is required.
- To optimize the installation, the resistance of this earth connection must have the lowest possible HF impedance. It should be checked that connections to separate earth socket distributions where equipotentiality is far away do not coexist within the same building or electrical cabinet.
- All these installation rules are valid for all protections.

Choice of material:

• The choice of surge protectors to install depends on the performance of the electrical equipment to be protected. The characteristics of surge arresters have been studied to be able to protect at all levels of an electrical installation.

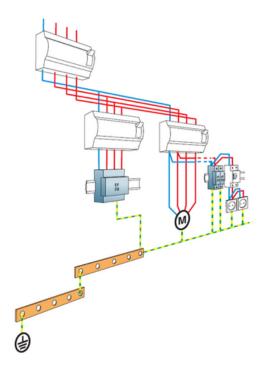

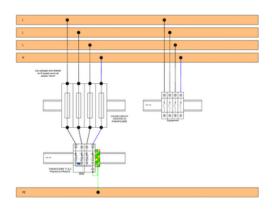

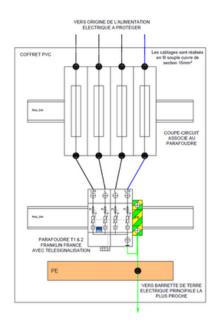

LV MULTIPOLAR ARRESTERS TYPE 1+2 MODE C1

The PFTIV13, PFTIV13T are plug-out Type 1+2 surge arresters, of very high power, intended to be installed at the entrance to the low-voltage installation when it is equipped with a lightning rod. The 'Multi-Varistor' technology used provides a very high discharge current and the best possible behavior for the LV network (no follow-on current). Given their very high discharge capacity, these surge protectors are particularly compact and are offered in a multi-pole version to protect single or three-phase networks.

| REFERENCES | | ASS8240PF2 | ASS8254PF2 | ASS8259PF2 | |
|---|---|------------------------------|----------------------|--------------|--|
| DESIGNATION | | PFT1V13 | PFT1V13M | PFT1V13T | |
| ELECTRICAL SPECIFICATIONS | | | | | |
| TYPE OF SURGE PROTECTOR | | 1+2 | | | |
| TECHNOLOGY | | MOV | | | |
| SURGE PROTECTOR CONFIGURATION | | Unipolar | Single phase | Tri+N | |
| CONNECTION MODE | | - | C1 (2+0) | C1 (4+0) | |
| IEUTRAL SYSTEM | | IT - TNS - TNC | IT - TNS | IT - TNS | |
| MAX AC VOLTAGE OPERATING | Uc | 440 Vac | | | |
| MAX LIGHTNING CURRENT PER POLE - MAXIMUM WAVE STRENGTH 10/350MS | AX LIGHTNING CURRENT PER POLE - MAXIMUM WAVE STRENGTH 10/350MS limp | | 12.5 kA | | |
| TOTAL SHOCK CURRENT - MAX. WITHSTAND TOTAL WAVE 10/350MS | Itotal | - 25 kA | | 50kA | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | In | 20 kA | | | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE WITHSTAND 8/20MS | lmax | 50 kA | | | |
| PROTECTION LEVEL (AT IN 8/20MS) | Up | 1,7 kV | | | |
| PROTECTION LEVEL (AT 5KA 8/20MS) | Up 5kA | 1,5 kV | | | |
| ASSOCIATED DISCONNECTORS | | | | | |
| FUSES | | 125 A min. 31 | 5 A max. type g | gG ou SFD-13 | |
| MECHANICAL CHARACTERISTICS | | | | | |
| END OF LIFE INDICATOR | | | Mechanical indicator | | |
| REMOTE SIGNALING | | Output on changeover contact | | | |
| COMPLIANCE WITH STANDARDS | | IEC 616 | 643-11 / NF EN 6 | 1643-11 | |







The PFTIV13-C2M and PFTIV13-C2T are plug-in Type 1+2 surge arresters, of very high power, intended to be installed at the entrance to the Low Voltage installation when it is equipped with a lightning rod. The 'Multi-Varistor' technology used provides a very high discharge current and the best possible behavior for the LV network (no follow-on current). Given their very high discharge capacity, these surge protectors are particularly compact and are offered in a multi-pole version to protect single or three-phase networks.

LV MULTIPOLAR ARRESTERS TYPE 1+2 MODE C2

| REFERENCES | | ASS8241PF2 | ASS8242PF2 | |
|---|--------|------------------------------|----------------|--|
| DESIGNATION | | PFT1V13-C2M | PFT1V13-C2T | |
| ELECTRICAL SPECIFICATIONS | | | | |
| TYPE OF SURGE PROTECTOR | | | -2 | |
| TECHNOLOGY | | IOC+ | GSG | |
| SURGE PROTECTOR CONFIGURATION | | Single phase | Tri+N | |
| CONNECTION MODE | | C2 (1+1) | C2 (3+1) | |
| NEUTRAL SYSTEM | | TT - TNS | TT - TNS | |
| MAX AC VOLTAGE OPERATING | Uc | 275 | Vac | |
| MAX LIGHTNING CURRENT PER POLE - MAXIMUM WAVE STRENGTH 10/350MS | limp | 12.5 | kA | |
| TOTAL SHOCK CURRENT - MAX. WITHSTAND TOTAL WAVE 10/350MS | Itotal | 25 kA | 50 kA | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | ln | 20 | kA | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE WITHSTAND 8/20MS | lmax | 50 | kA | |
| PROTECTION LEVEL L/N (AT IN 8/20MS) | Up L/N | 1,3 | kV | |
| PROTECTION LEVEL L/N (AT 5KA 8/20MS) | Up 5kA | 1 kV | 1.2 kV | |
| PROTECTION LEVEL N/PE (AT 5KA 8/20MS) | Up 5kA | 1 kV | 1.2 kV | |
| ASSOCIATED DISCONNECTORS | | | | |
| FUSES | | 125 A min. 315 A I | | |
| MECHANICAL CHARACTERISTICS | | | | |
| END OF LIFE INDICATOR | | Mechanical indicator | | |
| REMOTE SIGNALING | | Output on changeover contact | | |
| COMPLIANCE WITH STANDARDS | | IEC 61643-11 / I | NF EN 61643-11 | |







The PFTIEV25 are single-pole Type 1+2+3 surge protectors, of very high power, intended to be installed at the entrance to the Low Voltage installation. They make it possible to protect single-phase or three-phase networks in common mode or in common and differential mode. The `Eclateur + Varistor` technology allows a very low level of protection and an absence of follow-on current. The FTIEV25 is installed on DIN Rail and has a double connection for the active conductor, which allows an optimized connection to the network. The FTIEV25 surge protectors are intended to be mounted in multi-pole to protect single, three or three-phase + Neutral networks, sometimes associated with a specific N/PE surge protector.

| REFERENCES | | ASS8204PF2 | |
|---|------------------------------|---|--|
| DESIGNATION | PFT1EV25 | | |
| ELECTRICAL SPECIFICATIONS | | | |
| TYPE OF SURGE PROTECTOR | 1+2+3 | | |
| TECHNOLOGY | | Varistor + Specific gas gap | |
| SURGE PROTECTOR CONFIGURATION | | Unipolar | |
| NEUTRAL SYSTEM | | TT - TNS (C2 mode with DI surge protector for N/PE) | |
| MAX AC VOLTAGE STEADY STATE | Uc | 440 Vac | |
| | | 25 kA (associated with SFD1-25 or 315A gG fuse) | |
| MAX LIGHTNING CURRENT PER POLE - MAXIMUM WAVE STRENGTH 10/350MS | limp | 12.5 kA (associated with SFD1-13 or 125A gG fuse) | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | In | 30 kA | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE WITHSTAND 8/20MS | lmax | 70 kA | |
| PROTECTION LEVEL AT IN (8/20MS) AND AT 6 KV (1.2/50 MS) | Up | 1,5 kV | |
| PROTECTION LEVEL (AT 5KA 8/20MS) | Up 5kA | 1 kV | |
| ASSOCIATED DISCONNECTORS | | | |
| FUSES | | 125 A min. – 315 A max. or SFD1-13 – SFD1-25 | |
| MECHANICAL CHARACTERISTICS | | | |
| END OF LIFE INDICATOR | Mechanical indicator | | |
| REMOTE SIGNALING | Output on changeover contact | | |
| COMPLIANCE WITH STANDARDS | | IEC 61643-11 / NF EN 61643-11 | |



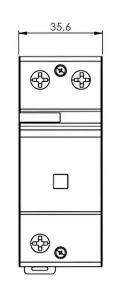

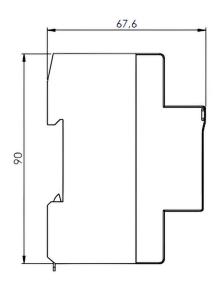



SURGE ARRESTERS N/PE UNIPOLAR

Single-pole Type 1+2+3 surge protectors, of very high power, intended to be installed at the entrance to the Low Voltage installation. They make it possible to protect single-phase or three-phase networks in common mode or in common and differential mode. The "Eclateur + Varistor" technology allows a very low level of protection and an absence of follow-on current. The surge protector is installed on a DIN Rail and has a double connection for the active conductor, which allows an optimized connection to the network. Surge protectors are intended to be mounted in multi-pole to protect single, three or three-phase + Neutral networks, sometimes associated with a specific N/PE surge protector.

| REFERENCES | | ASS8250PF2 |
|---|--------|-------------------------------|
| DESIGNATION | | PFT1E100 |
| ELECTRICAL SPECIFICATIONS | | |
| TYPE OF SURGE PROTECTOR | | N/A |
| TECHNOLOGY | | Specific gas gap |
| SURGE PROTECTOR CONFIGURATION | | Unipolar |
| NEUTRAL SYSTEM | | TT - TNS (mode C2) |
| MAX VOLTAGE STEADY STATE | Uc | 255 Vac |
| MAX LIGHTNING CURRENT PER POLE - MAXIMUM WAVE STRENGTH 10/350MS | limp | 100 kA |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | In | 100 kA |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE WITHSTAND 8/20MS | lmax | 100 kA |
| PROTECTION LEVEL AT IN (8/20MS) | Up | 1,5 kV |
| PROTECTION LEVEL (AT 5KA 8/20MS) | Up 5kA | 1 kV |
| MECHANICAL CHARACTERISTICS | | |
| END OF LIFE INDICATOR | | Non |
| REMOTE SIGNALING | | Non |
| COMPLIANCE WITH STANDARDS | | IEC 61643-11 / NF EN 61643-11 |



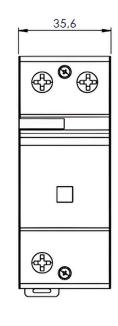

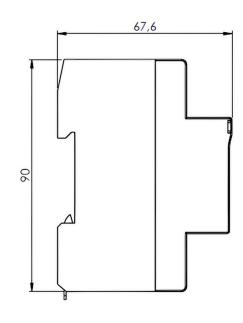

Single-pole Type 1+2+3 surge arresters, of very high power, intended to be installed at the entrance to the Low Voltage installation. They make it possible to protect single-phase or three-phase networks in common mode or in common and differential mode. The "Eclateur + Varistor" technology allows a very low level of protection and an absence of follow-on current. The surge protector is installed on a DIN Rail and has a double connection for the active conductor, which allows an optimized connection to the network. Surge protectors are intended to be mounted in multi-pole to protect single, three or three-phase + Neutral networks, sometimes associated with a specific N/PE surge protector.

LV MULTIPOLAR ARRESTERS TYPE 1+2+3 MODE C2

| REFERENCES | | ASS8204PF2 (X3) + ASS8250PF2 | |
|---|------------------------------|--|--|
| DESIGNATION | PMTIEV25 (x3) + PFTIE100 | | |
| ELECTRICAL SPECIFICATIONS | | | |
| TYPE OF SURGE PROTECTOR | | 1+2+3 | |
| TECHNOLOGY | | Varistor + Specific gas gap | |
| SURGE PROTECTOR CONFIGURATION | | 3Ph+N | |
| CONNECTION MODE | | C2 (3+1) | |
| NEUTRAL SYSTEM | | TT - TNS | |
| TENSION MAX. DE RÉGIME PERMANENTLY | Uc | 440 Vac | |
| | | 25 kA (associated with SFD1-25 or 3 gG fuse) | |
| MAX LIGHTNING CURRENT PER POLE - MAXIMUM WAVE STRENGTH 10/350MS | limp | 12.5 kA (associated with SFD1-13 or 1257 gG fuse) | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | ln | 30 kA | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE WITHSTAND 8/20MS | lmax | 70 kA | |
| PROTECTION LEVEL AT IN (8/20MS) AND AT 6 KV (1.2/50 MS) | Up | 1,5 kV | |
| PROTECTION LEVEL (AT 5KA 8/20MS) | Up 5kA | 1 kV | |
| ASSOCIATED DISCONNECTORS | | | |
| FUSES | | 125 A min. – 315 A max. or SFD1-13 – SFD1-25 | |
| MECHANICAL CHARACTERISTICS | | | |
| END OF LIFE INDICATOR | Mechanical indicator | | |
| REMOTE SIGNALING | Output on changeover contact | | |
| COMPLIANCE WITH STANDARDS | | IEC 61643-11 / NF EN 61643-11 | |




LV UNIPOLAR ARRESTERS TYPE 2

Type 2 PFT2V20 plug-in surge protectors are used for the protection of low voltage networks at the TGBT level. Based on high-power varistor technology equipped with disconnector and associated indicator, these surge protectors guarantee maximum protection efficiency, flow capacity and reliability. PFT2V20 surge protectors are available in a multi-pole version and in multiple voltages to protect all types of single-phase or three-phase networks.

| REFERENCES | | ASS8211PF2 | |
|---|--------|-------------------------------|--|
| DESIGNATION | | PFT2V20 | |
| ELECTRICAL SPECIFICATIONS | | | |
| TYPE OF SURGE PROTECTOR | | 2 | |
| TECHNOLOGY | | MOV | |
| SURGE PROTECTOR CONFIGURATION | | Unipolar | |
| NEUTRAL SYSTEM | | IT - TNS - TNC | |
| MAX AC VOLTAGE OPERATING | Uc | 440 Vac | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | In | 20 kA | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE WITHSTAND 8/20MS | lmax | 50 kA | |
| PROTECTION LEVEL AT IN 8/20MS | Up | 2 kV | |
| PROTECTION LEVEL AT 5 KA 8/20MS | Up 5kA | 1,5 kV | |
| ASSOCIATED DISCONNECTORS | | | |
| FUSES | | 50 A min. – 125 A max type gG | |
| MECHANICAL CHARACTERISTICS | | | |
| END OF LIFE INDICATOR | | Mechanical indicator | |
| REMOTE SIGNALING | | Output on changeover contact | |
| COMPLIANCE WITH STANDARDS | | IEC 61643-11 / NF EN 61643-11 | |



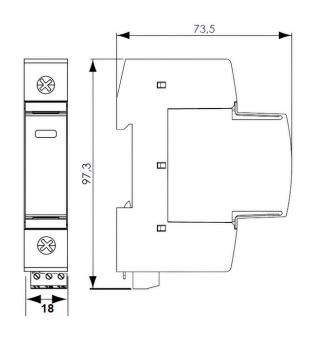

LV MULTIPOLAR ARRESTERS TYPE 2 MODE C2

The PFT2V20-C2M and PFT2V20-C2T Type 2 pluggable surge arresters are used for the protection of low voltage networks at the TGBT level. Based on high-power varistor technology equipped with disconnector and associated indicator, these surge protectors guarantee maximum protection efficiency, flow capacity and reliability. These surge protectors are available in a multi-pole version and in multiple voltages to protect all types of single-phase or three-phase networks.

| REFERENCES | ASS8233PF2 | ASS8234PF2 | | |
|---|------------|-------------------------------|----------------|--|
| DESIGNATION | | PFT2V20-C2M | PFT2V20-C2T | |
| ELECTRICAL SPECIFICATIONS | | | | |
| TYPE OF SURGE PROTECTOR | | 2 (or 3) | | |
| TECHNOLOGY | | IOC+GSG | | |
| SURGE PROTECTOR CONFIGURATION | | Single phase | Tri + N | |
| CONNECTION MODE | | C2 (1+1) | C2 (3+1) | |
| NEUTRAL SYSTEM | | TT - TNS | | |
| MAX. AC VOLTAGE OPERATING | Uc | 275 Vac | | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | In | 20 kA | | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE WITHSTAND 8/20MS | lmax | 50 kA | | |
| PROTECTION LEVEL L/N AT 5KA 8/20MS Up 5kA | | 1 kV | | |
| PROTECTION LEVEL N/PE AT 5KA 8/20MS Up 5kA | | 1 kV | | |
| ASSOCIATED DISCONNECTORS | | | | |
| FUSES | | 50 A min. – 125 A max type gG | | |
| MECHANICAL CHARACTERISTICS | | | | |
| END OF LIFE INDICATOR | | Mechanical indicator | | |
| REMOTE SIGNALING | | Output on changeover contact | | |
| COMPLIANCE WITH STANDARDS | | IEC 61643-11 / I | NF EN 61643-11 | |






SINGLE-POLE LY SURGE PROTECTORS TYPE 2 (OR 3)

The products in the range have the particularity of integrating the upstream fuse, which saves space in the electrical installation estimated at 60%. PFT2VF05 type 2 (or 3) pluggable surge arresters are used for the protection of low voltage networks at the TGBT level. In addition to their thermal disconnector linked to the varistor, they are internally equipped with protection against short-circuit currents, which avoids the use of a fuse or additional external circuit breaker as required by standardization. Operation of one of the two disconnectors will activate the fault indicator and remote signaling (option). This solution allows for simplification of implementation and compactness of installation. The PFT2VF05 are intended to be mounted in multipole to protect single and three-phase networks.

| REFERENCES | | ASS8230PF2 | |
|---|----------|--|--|
| DESIGNATION | PFT2VF05 | | |
| ELECTRICAL SPECIFICATIONS | | | |
| TYPE OF SURGE PROTECTOR | | 2 (or 3) | |
| TECHNOLOGY | MOV | | |
| SURGE PROTECTOR CONFIGURATION | Unipolar | | |
| NEUTRAL SYSTEM | | IT - TNS - TNC | |
| MAX AC VOLTAGE OPERATING | Uc | 440 Vac | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | ln | 5 kA | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE WITHSTAND 8/20MS | Imax | 15 kA | |
| PROTECTION LEVEL (AT IN 8/20MS) | Up | 1,5 kV | |
| ASSOCIATED DISCONNECTORS | | | |
| FUSES | | Internal (AC equivalent rating: 25A type gG) | |
| MECHANICAL CHARACTERISTICS | | | |
| END OF LIFE INDICATOR | | Mechanical indicator | |
| REMOTE SIGNALING | | Output on changeover contact | |
| COMPLIANCE WITH STANDARDS | | IEC 61643-11 / NF EN 61643-11 | |



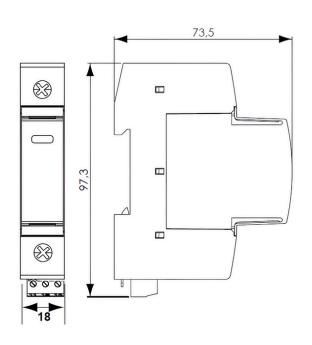

MULTIPOLAR LV SURGE ARRESTERS TYPE 2 (OR 3) MODE C2

The products in the range have the particularity of integrating the upstream fuse, which saves space in the electrical installation estimated at 60%. PFT2VF05-C2 type 2 (or 3) pluggable surge arresters are used for the protection of low voltage networks at the TGBT level. In addition to their thermal disconnector linked to the varistor, they are internally equipped with protection against short-circuit currents, which avoids the use of a fuse or additional external circuit breaker as required by standardization. Operation of one of the two disconnectors will activate the fault indicator and remote signaling (option). This solution allows for simplification of implementation and compactness of installation. The PFT2VF05-C2 are intended to be mounted in multi-pole to protect single and three-phase networks.

| REFERENCES | | ASS8243PF2 | ASS8244PF2 | |
|---|---|--|----------------|--|
| DESIGNATION | | PFT2VF05-C2M | PFT2VF05-C2T | |
| ELECTRICAL SPECIFICATIONS | | | | |
| TYPE OF SURGE PROTECTOR | | 2 (or 3) | | |
| TECHNOLOGY | | IOC+GSG | | |
| SURGE PROTECTOR CONFIGURATION | | Single phase | Tri + N | |
| CONNECTION MODE | | C2 (1+1) | C2 (3+1) | |
| NEUTRAL SYSTEM | | TT - TNS | | |
| MAX. AC VOLTAGE OPERATING | Uc | 275 Vac | | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | D DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | | 5 kA | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE WITHSTAND 8/20MS | | 15 kA | | |
| ASSOCIATED DISCONNECTORS | | | | |
| FUSES | | Internal (AC equivalent rating: 25A type gG) | | |
| MECHANICAL CHARACTERISTICS | | | | |
| END OF LIFE INDICATOR | | Mechanical indicator | | |
| REMOTE SIGNALING | | Output on changeover contact | | |
| COMPLIANCE WITH STANDARDS | | IEC 61643-11 / | NF EN 61643-11 | |







SPECIFIC SURGE ARRESTER DISCONNECTORS

The SFD range has been specially designed to be associated with a Type 1 AC SPD. The specific FRANKLIN FRANCE fuses have a high flow capacity to protect the SPDs from short circuit failure. Standards: In order to comply with IEC 61643-11 standards, the AC power SPD must be protected against short circuit failure: these specific fuse disconnectors must be installed in the SPD branch.

| REFERENCES | ASS1414CC | ASS1403CC | ASS1402CC | | |
|---|-----------|--|--|--|--|
| DESIGNATION | | 2P circuit breaker with SFD1-13S fuses | 3P circuit breaker with SFD1-13S fuses | 4P circuit breaker with SFD1-13S fuses | |
| ELECTRICAL SPECIFICATIONS | | | | | |
| MAX AC VOLTAGE OPERATING Uc | | 500 Vac | | | |
| MAX LIGHTNING CURRENT PER POLE - MAXIMUM WAVE RESISTANCE 10/350MS | limp | 12.5 kA | | | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | In | 12.5 kA | | | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE RESISTANCE 8/20MS | | 80 kA | | | |
| MECHANICAL CHARACTERISTICS | | | | | |
| END OF LIFE INDICATOR | | Striker | | | |
| REMOTE SIGNALING | | Yes | | | |
| COMPLIANCE WITH STANDARDS | | NF 61643-11 / IEC 61643-11 / NF 60269-1 / NF 60269-2 / IEC 60269-1 / IEC 60269-2 | | | |

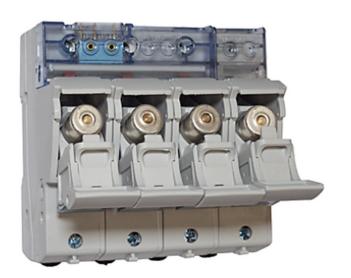


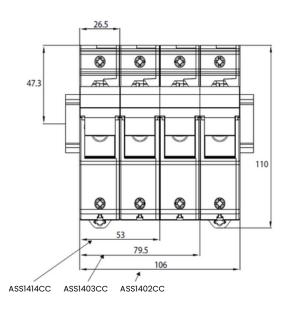


SPECIFIC SURGE ARRESTER DISCONNECTORS

The SFD range has been specially designed to be associated with a Type 1 AC SPD. The specific FRANKLIN FRANCE fuses have a high flow capacity to protect the SPDs from short circuit failure. Standards: In order to comply with IEC 61643-11 standards, the AC power SPD must be protected against short circuit failure: these specific fuse disconnectors must be installed in the SPD branch.

| REFERENCES | ASS1409CC | ASS1408CC | ASS1406CC | | |
|---|-----------|---|--|--|--|
| DESIGNATION | | 2P circuit breaker with SFD1-25S fuses | 3P circuit breaker with SFD1-25S fuses | 4P circuit breaker with SFD1-25S fuses | |
| ELECTRICAL SPECIFICATIONS | | | | | |
| MAX AC VOLTAGE OPERATING Uc | | 500 Vac | | | |
| MAX LIGHTNING CURRENT PER POLE - MAXIMUM WAVE RESISTANCE 10/350MS | limp | 25 kA | | | |
| RATED DISCHARGE CURRENT - 15 SHOCKS UNDER 8/20MS WAVE | In | 80 kA | | | |
| MAXIMUM DISCHARGE CURRENT - MAXIMUM WAVE RESISTANCE 8/20MS | | 100 kA | | | |
| MECHANICAL CHARACTERISTICS | | | | | |
| END OF LIFE INDICATOR | | IP20 | | | |
| REMOTE SIGNALING | | Yes | | | |
| COMPLIANCE WITH STANDARDS | | NF 61643-11 / IEC 61643-11 / NF 60269-1 / NF 60269-2 / IEC 60269-1 / IEC 60269-2 | | | |

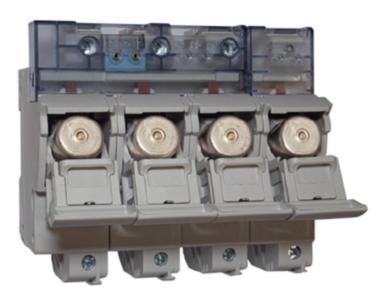

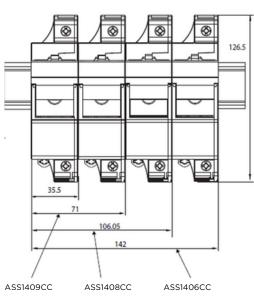



ASSOCIATED PRODUCTS

STORMDETEC - STORM DETECTOR

Advanced detection of storms makes it possible, with an anticipation period, to implement procedures of protection, to limit the importance of the destructive effects of storms to reduce their impact and economic cost to:

- Risks incurred by people,
- Risks linked to destruction, production hazards of goods or services.

The STORMDETEC $^{\mathbb{M}}$ (AVF3000DF) is a new generation storm detector for professional use, measuring variations in the electrostatic field of the atmospheric layer close to the ground based on the so-called "field mill" technique.

Its principle is based on the real-time and continuous measurement of the local electrostatic field and on the instantaneous recognition of symptomatic developments in this field which determine the high probability of an imminent storm with a local risk of lightning.

The STORMDETEC[™] is a professional storm detector with a wide spectrum of use, fully configurable according to the characteristics of the risk policy implemented by the user, mainly by adjusting the levels of the alarm thresholds, but also by the adjustment of its environment coefficient to compensate for the influence of the environment of the site on which it is installed.

The STORMDETE® comes with:

- A control box (CCA)
- An electrostatic field measuring head (TMC)
- 20 m of cable to connect the measuring head (TMC) with the control box (CCA),
- 5 m of cable to connect the CCA to a PC.
- Installation software
- · Technical and maintenance instructions.



The guying kit allows you to maintain the lightning rod, the masts as well as the pylons depending on the type of installation desired and the wind region.


It is composed of a 50 m Ø 5.6 mm fiberglass crown, 3 lantern tensioners, 6 anchor clamps, a 3-way guying collar, 3 Ø6 mm stainless steel shackles and a set of 3 expansion dowels Ø10mm.

This kit can be completed with the following accessories:

| REFERENCE | AFD1050KH |
|---------------------|--|
| Type d'installation | Lightning rod |
| Use | Maintenance of lightning rod and/or pylon depending on wind region |
| Material | Fiberglass - galvanized steel - stainless steel |
| Weight | 28,640 kg |
| Standards | NF EN 62305-3 - NFC 17102 |

| Fiberglass anchor clamp | AFD1051KU |
|---|-----------|
| Lantern tensioner 1 eye, 1 clevis Ø12 mm | AFD1052KU |
| 3-way guying collar | AFD1053KU |
| Crown of 50 m of fiberglass Ø 5.6 mm | AFD1050KU |
| Double expansion anchor Ø 12 mm | AFD1062KU |
| Stainless steel shackle Ø 6 mm | AFD1070KU |



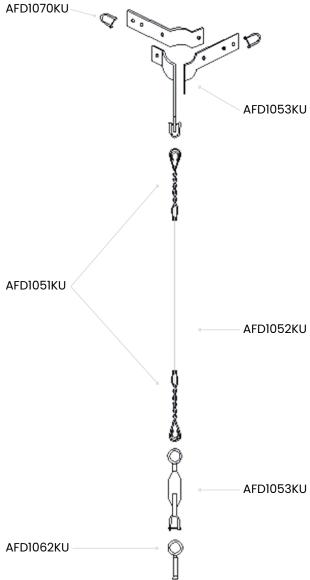

GUYED PYLONS

The guyed pylons are made from a hot-dip galvanized metal lattice beam, with a triangular section of 175 mm center distance with round tube frames with a diameter of 22 mm.

They are delivered in sections of 3 meters. The sections will be bolted together and will be equipped with stays.

| REFERENCE | Designation | Nature of sections | Weight |
|-----------|------------------|--------------------|----------|
| AFD1080KU | Guyed pylon 6 m | 2 by 3 m | 42,75 kg |
| AFD1081KU | 9 m guyed pylon | 3 by 3 m | 52,71 kg |
| AFD1082KU | Guyed pylon 12 m | 4 by 3 m | 67,01 kg |
| AFD1084KU | Guyed pylon 15 m | 5 by 3 m | 78,67 kg |
| AFD1083KU | Guyed pylon 18 m | 6 by 3 m | 96,23 kg |

SELF-SUPPORTING PYLONS

All self-supporting pylons are equipped with a base to be sealed at the same time as the construction of the concrete base. Section connections are made using bolted plates. The height and number of sections will depend on the height of the pylon.

All elements of the pylon are made of hot-dip galvanized steel.

Choice of material according to the following parameters and sizing of the mass:

- The installation location and therefore the wind region.
- Site qualification: normal or exposed.
- The type of soil.
- The force exerted on the aerials (total force to which the pylon is subjected).

| REFERENCE | Height | Charge maximum (daN) | Top surface | Recommended concrete mass C x C x H | Weight |
|-----------|--------|-------------------------|-------------|---|--------|
| AFC5006PA | 6 m | 100 | 0,67 | 1,3 x 1,3 x 1 m | 77 kg |
| AFC5007PA | 9 m | 40 | 0,33 | 1,3 x 1,3 x 1 m | 93 kg |
| AFC5009PA | 9 m | 100 | 0,63 | 1,4 x 1,4 x 1 m | 126 kg |
| AFC5015PA | 15 m | 100 | 0,56 | 1,7 x 1,7 x 1,2 m | 270 kg |
| AFC5018PA | 18 m | 100 | 0,96 | 1,7 x 1,7 x 1,2 m | 296 kg |
| AFC5024PA | 24 m | 100 | 0,64 | 2,2 x 2,2 x 1,4 m | 644 kg |



Our beacons are manufactured using LED technology. Dedicated to daytime and/or nighttime marking, they offer exceptional advantages in terms of longevity (100,000 hours), robustness and energy consumption. They can be supplied in 48V DC, 230V AC or solar version. We can also integrate a battery-backed system and redundancy with an emergency lamp. We are also able to supply a complete range of lighting equipment for heliports.

LOW INTENSITY OBSTACLE BEACONS

Our low intensity beacons feature LED technology. Dedicated to night marking of obstacles, they offer exceptional advantages in terms of longevity (100,000 hours), robustness and energy consumption (between 2 and 5W). They can be supplied with a photocell for autonomous management of the marking and a fault report to inform in the event of a fault in the marking.



MEDIUM INTENSITY OBSTACLE BEACONS

Our medium intensity beacons feature LED technology. Dedicated to the daytime and/or nighttime marking of obstacles, they offer exceptional advantages in terms of longevity (100,000 hours), robustness and energy consumption (between 15 and 50W average consumption). They can be supplied with a photocell for autonomous management of the marking and a fault report to inform in the event of a fault in the marking.



MARKING FOR HIGH VOLTAGE LINES

Our range for High Voltage lines is mainly composed of two products:

- The 600mm marking sphere: dedicated to daytime marking of lines, it must be installed on the guard cable (not powered) of the line and is available in red, white, orange or two-tone version.
- The induction beacon: dedicated to nighttime marking of lines, this beacon, equipped with LED technology, works by induction and must be installed on one of the conductor cables of the power line.
 The system is suitable for any line voltage (1kV to 500kV) and can operate on lines ranging from 10A to 3000A.









CONTACTS

FRANKLIN FRANCE

13 RUE LOUIS ARMAND, 77330 OZOIR-LA-FERRIÈRE FRANCE

TEL: +33 (0)1 60 34 54 44

franklin@franklin-france.com contact@franklin-france.com

WWW.FRANKLIN-FRANCE.COM





FR4NKLIN FR4NCE



Follow us now on LinkedIn so you don't miss any of the latest news and exciting projects from Franklin France!