


Aluminum strapping 30 x 3 mm

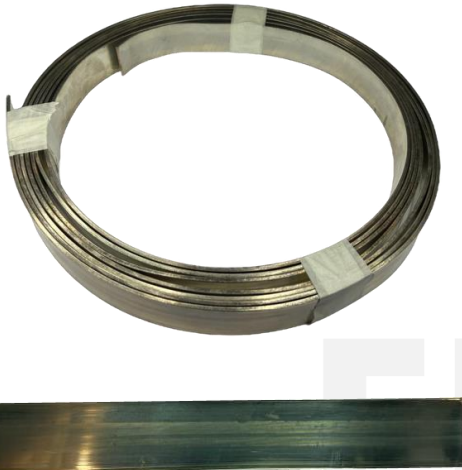

This conductor is used for the flow of the lightning current and the creation of equipotential bonds.

Its use will be favored for the realization of capture conductors, down conductors and equipotential links.

This conductor can be held by all the fasteners in the FRANKLIN France range including the AFH6414AC, AFH6415AC, AFH6416AC, AFH6502CL, AFH8039PC, AFH2030CM, AFH7000AC, AFH2001AC, AFH6032BM fasteners.

The equipotential links can be connected to the down conductors and capture conductors by aluminothermic welding or mechanical clamping parts from the FRANKLIN France range of the flat/round connector type (AFJ0819RL), crossing connector (AFJ0005RC).

The spacing between each fixing will be determined according to the applicable installation standard (NFC 17102 or NF EN 62305-3).

Characteristics

Reference :	AFG4303CP
Type of installation :	Down conductor, mesh cage, equipotential bonds, earth network
Use :	Fixing by clamping or pressurizing depending on the fixing chosen and the installation standard.
Reference :	Flow and /or lightning current capture
Display :	-
Conductor :	Conductor by section of 90mm ²
Material :	Aluminum
Dimensions :	30 x 3 mm
Weight :	0,240 kg/m
Index of protection :	-
Standards :	NF EN 62561-2

Franklin Technologie® - A full range of lightning and overvoltage protection.

In the continue framework of its products, Franklin France shall be entitled to modify specifications without notice