

Plastic Clip




Supplied with 2 stainless steel screws $\varnothing 4$ mm

These clips are used to fix flat or round conductors on all material.

Conductors type tinned copper strip 27x2mm, stainless steel 30x2mm, aluminium 30x3mm, galvanized steel 33,5x3mm and round $\varnothing 8$ and 10mm are maintained in pressure at the upper removable part level.

This piece allows spacing out the conductor of 24mm minimum regarding to the support (height between the base and conductor axis).

The main body is drilled in its center $\varnothing 6$ mm and no threaded.

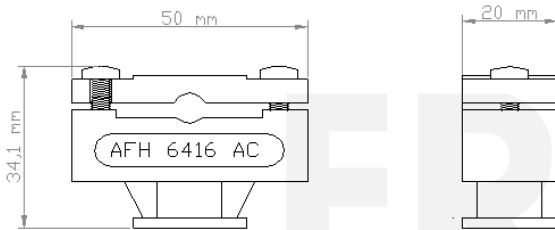

Caracteristics

Reference :	AFH6416AC
Type of installation :	Fixing and support of conductor type strip or round
Assembly :	Fixing on all type of support with M6 screw maxi. Can be disassembled with 2 inox screws $\varnothing 4$ mm
Use :	Fixing down conductors and equipotential connections
Display :	-
Conductors :	Strip of section 27x2 to 33,5x3 mm and round $\varnothing 8$ to 10mm
Material :	polypropylene plastic
Dimensions :	50 x 34,1 x 20 mm
Weight :	0,023 kg
Index of protection :	-
Standards :	NF EN 62561-4

Franklin Technologie® - A full range of lightning and overvoltage protection.
In the continue framework of its products, Franklin France shall be entitled to modify specifications without notice