

### Plastic clip

in compliance with NF EN 62561-4 standard




These clips are used to fix flat or round conductors on all material.

Conductors type tinned copper strip 27x2mm, stainless steel 30x2mm, aluminium 30x3mm, galvanized steel 33,5x3mm and round Ø8 and 10mm are maintained in pressure at the upper removable part level. This piece allows spacing out the conductor of 24mm minimum regarding to the support (height between the base and conductor axis).

The main body is bored at Ø6mm, no threaded.

The space between each fixing will be determined according to the applicable installation standard (NFC 17102 or NF EN 62305-3).

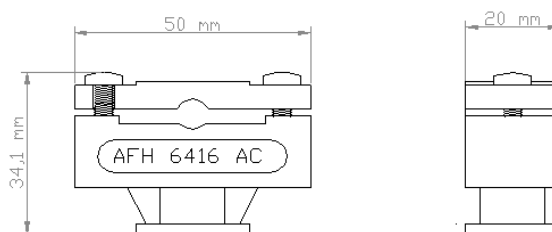

### Characteristics

| Reference :            | AFH 6416 AC  |
|------------------------|--|
| Type of installation : | Fixing and support of conductor type strip or round  |
| Assembly :             | Fixing on all type of support with M6 screw maxi.<br>Can be disassembled with 2 inox screws Ø4mm |
| Use :                  | Fixing of the down conductor and equipotential connections                                       |
| Display :              | -  |
| Conductors             | Strip coil of section 27x2 to 33,5x3 mm and round Ø8 to 10mm                                     |
| Material :             | polypropylene plastic  |
| Dimensions :           | 50 x 34,1 x 20 mm  |
| Weight :               | 0,023 g  |
| Indice of protection : | -  |
| Standards :            | NF EN 62561-4 - NF EN 62305-3 - NFC 17102  |
|                        |  |
|                        |  |

Franklin Technologie ® - A full range of lightning and overvoltage protection.

In the continue framework of its products, Franklin France shall be entitled to modify specifications without notice