

Equipotentiality terminal



Delivered with 2 insulators and 2 head screw H brass M8mm and 2 brass discs Ø8mm


These equipotential terminal is used for the connection of different earth conductors (strip coil, multibraid, sheathed cable,).

In bare copper, this equipotential terminal can be installed on insulators.

It can be installed on all type of support (concrete, bay frame, steel rack,) or in an inspection pit.

Allows a distance between the conductors of 40mm regarding to the support

Exists in 1750xx5mm, 70 holes (AFK0125BE) without insulators
 Exists in 1750x80x5mm, 140 holes (AFK0080BE) without insulators
 Exists in 1750x100x5mm, 140 holes (AFK0100BE) without insulators
 Earth bar insulator only (AFH4000IT).

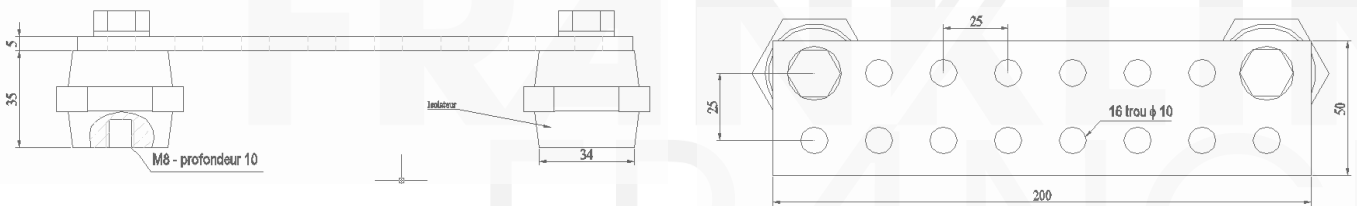

Caracteristics

Reference :	AFK0020BE
Type of installation :	Earthing system
Assembly :	Insulators to fix. Equipotential terminal-Can be dismantled with 2 brass screws head H Ø10mm
Use :	Electrical earthing system interconnection, lightning earthing system and equipotential connections
Display :	-
Conductors	Strip coil all sections, round conductors, multibraid, sheathed braid
Material :	Terminal : bare copper / Insulator: Polyamide
Dimensions :	Terminal : 200 x 50 x 5 mm / insulator : Ø40 x 40 mm
Weight :	Terminal : 0,590 g / Insulator : 0,100 g
Index of protection :	-

Franklin Technologie® - A full range of lightning and overvoltage protection.
 In the continue framework of its products, Franklin France shall be entitled to modify specifications without notice