


Antenna mast splitter



It realizes the protection of the antenna by making a short circuit between the antenna and the ground when the lightning strikes on this one.

It can be attached to the antenna mast using collars AFH1051CS, AFH1052CS, AFH1053CS or AFH1054CS depending on the diameter of the mast.

Supplied with a support plate, 2 M8 screws and screw clamps.

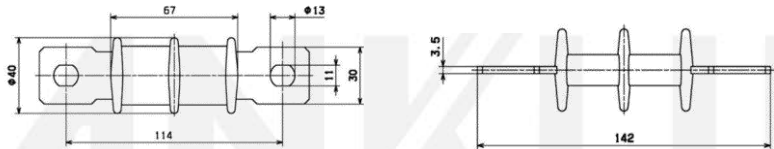

Characteristics

Reference :	AFY7600EA
Type of installation :	Equipotentialité
Use :	Connection by clamps and bolting
Reference :	Insulation of metal mass during a lightning strike
Flow capacity:	20 à 50 kA
Level of protection U_p (ignition voltage, 1.2/50 wave):	1,5 kV
Discharge Current Detected:	100 kA - 10 x (onde 8/20)
Input and output conductors:	strip 27x2mm à 33,5x3mm
Material :	Stainless steel + resin
Dimensions :	180 x 50 x 40 mm
Weight :	0,350 kg
Index of protection :	IP65
Standards :	-

Franklin Technologie® - A full range of lightning and overvoltage protection.

In the continue framework of its products, Franklin France shall be entitled to modify specifications without notice