

### Flat tile clip




Available in length of  
100mm (AFH 0031AM)

These fasteners allow flat conductors to be fixed directly to tile and slate roofs.

They slide under the tiles as shown in the diagram below. The conductors are then kept under pressure.

The spacing between each fixing will be determined according to the applicable installation standard (NFC 17102 or NF EN 62305-3).

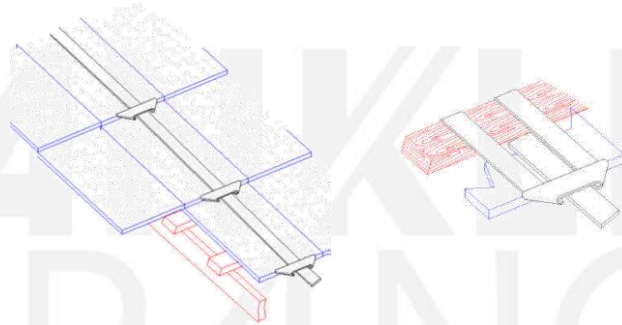

### Characteristics

Reference :	<b>AFH0030AM</b>
Type of installation :	Down conductor
Assembly :	Maintaining the conductor by pressure between the tiles
Use :	Fixing down conductor and equipotential bonds
Display :	-
Contents:	-
Conductor :	Section strip 27x2 à 33,5x3 mm
Material :	Tinned copper
Dimensions :	200 x 64 x 0,8 mm
Weight :	0,040 kg
Index of protection :	-
Standards :	NF EN 62561- 4

Franklin Technologie® - A full range of lightning and overvoltage protection.

In the continue framework of its products, Franklin France shall be entitled to modify specifications without notice