


### Plastic clip



Delivered with 2 inox screws  $\varnothing$ 4mm

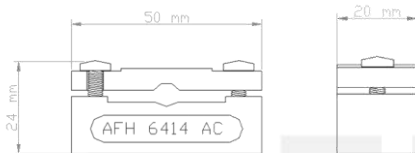

These fixings are designed for fixing flat or round conductors on all type of support.

Conductors of type 27x2mm, tinned copper strip coil, 30x2mm stainless steel, 30x3mm aluminum, 33,5x3mm galvanized steel and round  $\varnothing$ 8 and 10mm are maintained by pushing at the removable upper part.

This pièce allows spacing the conductor of 18mm regarding to the support (height between the base and conductor axis).

The main body is bored at  $\varnothing$ 6mm, no threaded.

### Characteristics

Reference :	<b>AFH6414AC</b>
Type of installation :	Down conductor and bonding when merging
Assembly :	Fixing on all type of support with M6 screw maxi. Can be disassembled with 2 inox screws $\varnothing$ 4mm
Use :	Fixing of the down conductor and equipotential connections
Display :	-
Conductors	Strip coil of section 27x2 to 33,5x3 mm and round $\varnothing$ 8 to 10mm
Material :	polypropylene plastic
Dimensions :	50 x 24 x 20 mm
Weight :	0,023 g
Indice of protection :	-
Standards :	NF EN 62561- 4

Franklin Technologie<sup>®</sup> - A full range of lightning and overvoltage protection.  
In the continue framework of its products, Franklin France shall be entitled to modify specifications without notice