


### Inox clip

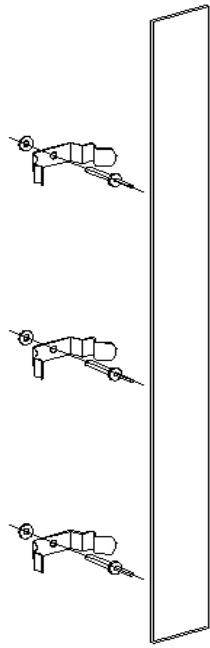

Inox clips are designed for fixing conductors type copper strip coil 27x2mm on all type of support with waterproof pop rivet of Ø4mm (AFH0075RP), screw (AFH0075RP), expansion plug (AFH8050CE), self drilling screw Ø3,9mm, spit or screws Ø4mm max.

Conductors type strip coil are maintained by pushing on each side of the clip. If it is necessary, the ends of the clip can be refolded on the conductor for a better support. For an installation on cladding, add a waterproof disc (AFH0075RN)

The space between each fixing will be determinate according to the applicable installation standard (NFC 17102 or NF EN 62305-3).

Exists for 30x3mm aluminium strip coil, ref AFH6502CL

Exists for 33,5x3mm galvanized steel strip coil, ref AFH6503CL



Delivered by bag of 30 pieces,  
Fixings no included

### Caracteristics

Reference :	<b>AFH6500CL</b>
Type of installation :	Down conductors
Assembly :	Fixing on all types of support with screw, rivet, spit Ø4mm maxi. Installation of the conductor by « clamping »
Use :	Fixing of the down conductor and equipotential connections
Display :	-
Conductors :	Copper strip coil 27x2 mm section
Material :	Inox
Dimensions :	41 x 10 x 14 mm
Weight :	0,002 g
Protection index :	-
Standards :	NF EN 62561-4

**Franklin Technologie® - A full range of lightning and overvoltage protection.**  
In the continue framework of its products, Franklin France shall be entitled to modify specifications without notice